


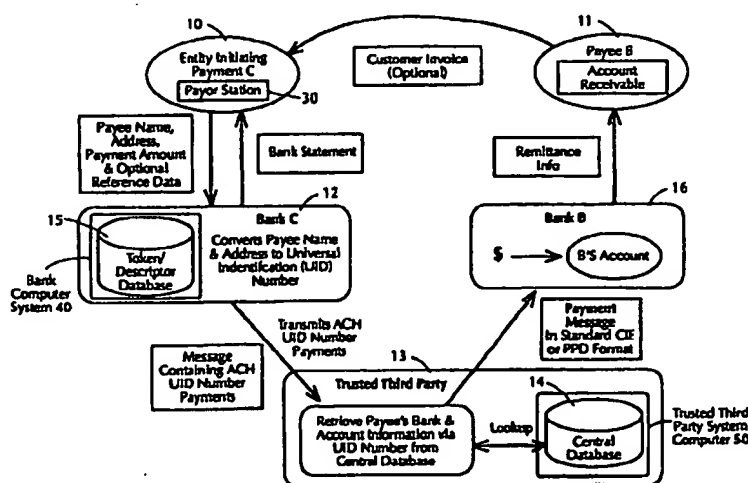

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>G06F 15/21</b>		<b>A1</b>	(11) International Publication Number: <b>WO 99/56219</b>
			(43) International Publication Date: <b>4 November 1999 (04.11.99)</b>
(21) International Application Number: <b>PCT/US99/09064</b> (22) International Filing Date: <b>27 April 1999 (27.04.99)</b> (30) Priority Data: <b>09/066,702</b> <b>27 April 1998 (27.04.98)</b> <b>US</b> (71) Applicant: <b>THE CLEARING HOUSE SERVICE COMPANY L.L.C. [US/US]; 100 Broad Street, New York, NY 10004 (US).</b> (72) Inventors: <b>THOMAS, George, F.; 111 Middlesex Avenue, Oakdale, NY 11769 (US). WOOD, Albert, G.; 8 Landview Drive, Kings Park, NY 11754 (US). PAWELCZYK, Joseph, S.; 9 Wyckoff Way, Morris Plains, NJ 07950 (US). COTTON, Robert, M.; Apartment #304, 2350 Broadway, New York, NY 10024 (US).</b> (74) Agent: <b>RAGUSA, Joseph, W.; Fitzpatrick, Cella, Harper &amp; Scinto, 30 Rockefeller Plaza, New York, NY 10112-3801 (US).</b>			(81) Designated States: <b>CA, MX.</b>  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: **ELECTRONIC FUNDS TRANSFER METHOD AND SYSTEM AND BILL PRESENTMENT METHOD AND SYSTEM**

## (57) Abstract

A funds transfer system described facilitates electronic funds transfer between two parties. The home banking system computer (40) is operable, upon receipt of the payment order from the payor station (30), to generate a universal identifier number uniquely identifying the payee and to transmit electronically the universal identifier number to the trusted third party via a communication with the trusted third party system. The trusted third party system computer (50) also being operable, in response to receipt of the universal identifier number from the home banking system, to identify the payee as a party to receive payment, to generate a routing/transit number of the bank of the payee and the payee's account number from the universal identifier number, and to communicate electronically with the bank of the payee to facilitate transfer of the amount owed to the payee's account to the bank of the payee.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LJ	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

- 1 -

# TITLE

ELECTRONIC FUNDS TRANSFER METHOD AND SYSTEM AND BILL  
PRESENTMENT METHOD AND SYSTEM

## BACKGROUND OF THE INVENTION

### Field of the Invention

5

The present invention, according to a first aspect, relates to an electronic funds transfer method and system, and, according to a second aspect, an electronic bill presentment method and system.

10

### Related Background Art

The current environment for payments involving business and banks is primarily a paper one. Businesses and  
15 banks have become masters of paper--business in handling payment remittances and banks in check processing. This efficiency in paper processing has created a weak or non-existent electronic bill payment infrastructure. The majority of businesses cannot post  
20 electronic payment information directly into their accounts receivable systems. The majority of banks do not have the ability to deliver remittance information to their business customers.

- 2 -

Banks are in a unique position at the center of the bill payment process. They hold the customer accounts from which payments are authorized and are uniquely positioned to deliver the remittance information to the  
5 biller. Banks are also positioned to deliver the invoice information to the billers' customers who are also the banks' customers.

Despite the widespread availability of ATMs and direct  
10 deposit of paychecks, most consumers have not embraced electronic payment systems. Discussion will follow of several prior art payment systems.

In conventional non-electronic bill payment systems,  
15 where an ongoing relationship exists, a party initiating payment (also referred to hereinafter as "payor" or "consumer") pays a debt to a biller by mailing a check in response to receipt of the biller's invoice. The term biller is used to refer to the payee  
20 or entity to be paid. Attached to most biller's invoices is a payment coupon to be returned with the check. The coupon contains at least the consumer-biller account number (C-B account number), as well as other information that will assist the biller,  
25 or the biller's bank, in properly crediting the consumer (i.e., the party initiating payment) with payment.

In recent years, with the common appearance of personal  
30 computers (PCs) in the home, electronic home banking has become increasingly popular. Electronic home banking systems permit consumers to automate the process of making payments to companies and individuals. Payment instructions are typically  
35 initiated by the consumer (party initiating payment) from the home PC terminal and forwarded electronically, generally over a telephone line, to the consumer's bank

- 3 -

or other financial institution supporting home banking. In response to receipt of the payment instructions, payments are created by the bank or financial institution in a variety of methods. Payment  
5 instructions also have conventionally been transmitted via ATM or telephone touch tone keypad.

In one type of prior art electronic home banking system, illustrated in Fig. 1, the electronic payment  
10 instructions initiated by the consumer are converted by a bill pay service bureau, which may or may not be a bank, to a paper check, which is then mailed to the biller B, for eventual deposit into biller's bank account in bank B.

15 The electronic home banking system illustrated in Fig. 1 includes: consumer C 12, bank C 16, bank B 18, possibly a lockbox operator (not shown in Fig. 1), and biller B, who is typically not a willing participant in  
20 this system for reasons discussed further below. Additionally, a service bureau S 20 and a Bank S 22 are participants, with service bureau S maintaining a service database 24 that is used to match bill payment orders with billers.

25 In the bill pay system of Fig. 1, consumer C enrolls in the system by sending service bureau S an enrollment package comprising a voided check and list of billers to be paid by S on behalf of C. S subsequently sends  
30 biller B a biller confirmation to verify that C is actually a customer of B.

In the conventional, i.e., paper, bill payment method, the proper biller is identified by the remittance  
35 envelope and the payment coupon. However, neither of these are available to service bureau S in the system illustrated in Fig. 1. Thus, service bureau S must

- 4 -

identify the correct biller for each bill payment order in some other manner. Typically, this is done by asking consumer C for biller B's name, address, telephone number and the C-B account number. Since it  
5 is possible that service bureau S does not have any account relationship with biller B, they must rely upon consumer C's accuracy in preparing enrollment package used to put biller B's information into service  
10 database 24. Service bureau S typically requires this information only once, during biller enrollment, storing it to service database 24 for use with subsequent payments directed to the same billers.

At some point after enrollment, consumer C receives a  
15 bill and initiates a bill payment order to S. The bill payment order includes authorization for service bureau S to withdraw funds from C's account in bank C to pay the bill, the amount to pay, the date on which to pay, and an indication of biller B as the payee. Service  
20 bureau S responds by confirming receipt of the bill pay order. Consumer C can send the bill pay order in any number of ways, such as using a personal computer and modem, directly or through a packet or other data network, via an automatic teller machine (ATM), video  
25 touch screen, a screen phone, or telephone Touch-Tone™ pad interacting with a voice response unit (VRU). However this is done, service bureau S receives one or more bill pay orders from consumer C. These orders could be instructions to pay some amount for a  
30 particular bill or a set amount of money at periodic intervals.

Once service bureau S has confirmed that biller B is the biller that consumer C desired to pay with the bill  
35 pay order, service bureau S passes the funds to biller B after securing funds to cover the remittance. Bill payment can take several forms. A "check and list" is

- 5 -

common in the art. A check and list comprises a single payment, a check drawn on service bureau S's account in bank S, accompanied by a list of all consumers whose individual remittances are aggregated in the single  
5 check. The list shows C-B account numbers and payment amounts for each consumer included on the list that should total to the amount of the single check.

The system of Fig. 1 has several drawbacks. For one  
10 thing, in response to an invoice mailed to the consumer, the biller expects to receive: (1) a check directly from the payor, along with (2) the payment coupon having encoded thereon, among other things, the C-B account number. Receipt of the check from the bill  
15 pay service S, rather than from the consumer, and without the coupon, must be treated by the biller as an exception item, which generates a great deal of additional expense for the biller.

20 Moreover, from the point of view of the consumer (payor), such a system implementation is inconvenient at least because of the time delays involved in preparing the check. The consumer might assume that, because the transfer was initiated electronically, the  
25 payment to the biller was instantaneous, or at least performed more rapidly than if the consumer had mailed the check himself. In reliance upon this belief, the consumer might delay initiating a payment longer than he would if paying by his own check. Such a delay  
30 could result in late payments and customer relations headaches for the bill paying bureau.

Additionally, the system illustrated in Fig. 1 requires enrollment by the consumer in the system and requires  
35 that the consumer have a continuing relationship with the biller. Thus, this system is not useful for

- 6 -

processing one-time, or infrequent, financial transactions.

Some of these problems could be solved by a system in which payment actually is made to the biller (payee) electronically, rather than by check. In one such system, described in U.S. Patent 5,465,206, issued to Hilt et al., participating consumers pay bills to participating billers through a payment network. The participating consumers receive bills from participating billers (paper/mail bills, e-mail notices, implied bills for automatic debts) that indicate an amount owed, and a unique biller identification number (BRN).

In the Hilt et al. system, to authorize a remittance, the consumer transmits to its bank (also a participant in the system) a bill pay order indicating a payment date, a payment amount, the C-B account number, a source of funds and the BRN. The consumer's bank then submits a payment message to a payment network, and the payment network, which assigns the BRN's, forwards the payment message to the biller's bank. For settlement, the consumer's bank debits the consumer's account and is obligated to a net position with the payment network; likewise, the biller's bank receives a net position from the payment network and credits the biller's bank account. The biller's bank, upon receipt of the payment message, releases the funds to the biller, and provides Accounts Receivable (A/R) data to biller in a form that the biller has indicated, the form being one that does not have to be treated as an exception item to the biller, unlike in the system of Fig. 1. The biller's bank is assured of payment by the payment network, unless the transaction is a reversible transaction according to the preset rules of the payment network. In specific embodiments of the Hilt



- 7 -

system, the consumer initiates the bill pay orders manually, via paper, at an ATM, via PC, or via telephone keypad.

- 5 However, because, in the Hilt system, the consumer initiating payment must know, among other things, a special identifier that uniquely identifies the biller, in this case the biller's BRN, this system is of limited usefulness for transactions between parties  
10 that do not have an ongoing relationship, where the consumer will likely only know the biller's name and address. In addition, the BRN's, which correspond to billers' account numbers, are disseminated to all payors, which may not be optimal for reasons of  
15 security.

Thus, the need exists for a system and method that would enable the payor to initiate an electronic payment without knowledge of a special identifier  
20 corresponding to the biller's bank and account number.

The need also exists for a system by which billers can present bills to payors electronically.

25 SUMMARY OF THE INVENTION

It is an object of the present invention to solve the aforementioned problems of prior art systems by providing a method by which the confidential information of a first party be uniquely identified  
30 based upon name and address information supplied by a second party without the need for the second party to have access to the confidential information.

It is another object of the present invention to solve  
35 the aforementioned problems of prior art systems by providing an electronic funds transfer method and system in which the biller's routing number and account

- 8 -

number can be uniquely identified by the electronic home banking system based upon consumer supplied biller name and address information without the need for the consumer's bank to have access to the biller's bank account number and in which payment can be made electronically to the identified account.

It is a further object of the invention to provide an electronic home banking method and system that protects the security of bank customers and their bank's proprietary interests, without unnecessarily distributing information regarding bank affiliation or account number.

It is a further object of the invention to provide a method and system of electronic bill presentment that permits billers to present bills to payors at the payors home banking systems without the need for the biller to have access to information regarding the payor's bank.

To further these objects, a funds transfer system for facilitating electronic funds transfer between a payor and a payee by means of an intermediate trusted third party is provided. The funds transfer system comprises: a payor station including a device for electronic communication of a payment order, said payment order comprising the payee's name, address and an amount owed by the payor to the payee; a home banking system including a computer structured to communicate electronically with the payor station, to receive the payment order, and with the trusted third party; a trusted third party system associated with the trusted third party, the trusted third party system comprising a computer structured to communicate electronically with both the home banking system and a bank of the payee. The home banking system computer is

- 9 -

operable, upon receipt of the payment order from the payor station, to generate a universal identifier number uniquely identifying the payee and to transmit electronically the universal identifier number to the  
5 trusted third party via a communication with the trusted third party system. The trusted third party system computer is operable, in response to receipt of the universal identifier number from the home banking system, to identify the payee as a party to receive  
10 payment, to generate a routing/transit number of the bank of the payee and the payee's account number from the universal identifier number, and to communicate electronically with the bank of the payee to facilitate transfer of the amount owed to the payee's account to  
15 the bank of the payee. Preferably, the home banking system computer has stored therein a database, supplied by the trusted third party, including name and address information of the payee and the universal identifier number, and not including corresponding routing/transit  
20 and account number information of the payee.

To further these objects, a method of electronic funds transfer between a payor and a payee by an intermediate trusted third party is provided. The method comprises  
25 the steps of: upon receipt by the trusted third party of a universal identifier number uniquely identifying the payee and generated, in response to a payment order from the payor, by a home banking system of the payor from information stored on a database resident at the  
30 home banking system, generating, at the trusted third party, from the received universal identifier number a routing/transit number of the payee's bank and the payee's account number to identify the payee as a party to receive payment, the routing/transit number of the  
35 payee's bank and the payee's account number being known only to the trusted third party; and communicating, by the trusted third party, with payee's bank to

- 10 -

facilitate transfer of an amount owed by the payor to the payee to the payee's account in the payee's bank. The method preferably further comprises the steps of generating the database at the trusted third party, the  
5 database including name and address information of the payee and the universal identifier number uniquely identifying the payee, and not including corresponding routing/transit and account number information of the payee, and distributing, before the routing/transit  
10 number generating step, the database to the home banking system.

To further the above objects, there also is provided a funds transfer system for facilitating electronic funds  
15 transfer between a home banking system of a payor and an account of a payee. The system comprises: a trusted third party structured to communicate with both the home banking system and a bank of the payee maintaining payee's account, means associated with the  
20 home banking system for transmitting a universal identifier number to the trusted third party in response to receipt by the home banking system of a payment order from the payor, the universal identifier number uniquely identifying the payee; means associated  
25 with the trusted third party operable in response to receipt of the universal identifier number from the home banking system to identify the payee as a party to receive payment, and for converting the universal identifier number so as to identify the routing/transit  
30 number of the payee's bank and the payee's account number; and means associated with said trusted third party for communicating with payee's bank to facilitate payment in accordance with payor's payment order to payee's account.

35

To further the above objects of the present invention, there also is provided a method for electronic bill

- 11 -

presentment between a biller and a payor by a trusted third party intermediary. The method comprises: generating, by the trusted third party, a database including name and address information of the payee and  
5 a universal identifier number uniquely identifying the payee, and distributing the database to a home banking system of the payor; receiving, at the trusted third party, a biller order from the biller, the biller order comprising the payor's name, address and an amount to  
10 be paid by the payor to the biller; upon receipt by the trusted third party of the biller order, generating, at the trusted third party, a bill routing message and transmitting the bill routing message to the payor's home banking system, the message including the  
15 universal identifier number corresponding to the payor; and upon receipt by the home banking system of the bill routing message from the trusted third party, routing, by the home banking system, a bill to the payor corresponding to the bill routing message. The trusted  
20 third party preferably routes the bill to the payor using an ACH message formed based upon routing information resident in a master database resident at the trusted third party.

25 To further the above objects of the present invention, there also is provided a method of electronic funds transfer between a payor and a payee by an intermediate trusted third party, the trusted third party having previously distributed to a home banking system of the  
30 payor a database including universal identifier numbers uniquely identifying accounts including that of the payee. The method includes the steps of: receiving, at the home banking system, a payment order from the payor; upon receipt by the home banking system of the  
35 payment order, identifying, at the home banking system, the universal identifier number uniquely identifying payee's account from information stored in the

- 12 -

database; and transmitting, by the home banking system, the universal identifier number identified in the identifying step, to the trusted third party to facilitate payment to payee's account.

5

To further the above objects of the present invention, there also is provided a computer-readable medium for storing data for access by an application program being executed on a data processing system resident at a  
10 trusted third party that has been supplied with confidential information of customers of at least one participating institution. The medium comprises: a data structure stored in the computer-readable medium, the data structure including information resident in a  
15 database used by the application program and comprising: a plurality of descriptors, each descriptor including a set of indicia identifying name, address, and the confidential information for one of the customers of the at least one participating  
20 institution, and a universal identifier uniquely identifying the one customer. Preferably, the confidential information comprises routing/transit number and account number information associated with each customer.

25

To further the above objects of the present invention, there also is provided a method of transferring funds from a home banking system of a payor to an account of a payee. The method comprises the steps of: upon  
30 receipt by the home banking system of a payment order from the payor that includes character information, encoding the received character information by assigning a numerical value to identified nonblank character strings present in the received character  
35 information; forming a descriptor of indicia identifying the payee using the encoded numerical information; comparing the formed descriptor with

- 13 -

database descriptors stored in a database supplied by a trusted third party until a match is found; and transmitting a universal identifier, associated in the database with the matching database descriptor and  
5 uniquely identifying the payee, to the trusted third party to facilitate payment to payee's account.

To further the above objects of the present invention, there also is provided a web-based bill presentment  
10 method for presenting bills by a biller to a payor using a trusted third party having a resident database including an e-mail address of the payor, the payor being a customer of a bank that has a bill presentment server. The method comprises: receiving, at the  
15 trusted third party, a bill presentment order from the biller; and in response to an inquiry from the bill presentment server of payor's bank, transmitting billing information of the biller to the payor's bank, which in turn, by means of the bill presentment server,  
20 presents the bill for display to the payor using the e-mail address of the payor. Preferably, display means linked to the bill payment server is made available to the payor, and the payor indicates a willingness to pay the bill by clicking a payment icon displayed by the  
25 display means and associated with the bill.

To further the above objects of the invention, there also is provided a method of correlating between at least two entities by an intermediate trusted third  
30 party. The method comprises the steps of: receiving, by the trusted third party, a universal identifier number uniquely identifying a first one of the at least two entities and generated in response to a inquiry from a second one of the at least two entities from  
35 information stored on a database; and generating, at the trusted third party, from the received universal identifier number confidential information relating to

- 14 -

the first one of the at least two entities to identify the first one, the confidential information being known only to the trusted third party.

- 5 The method preferably further comprises the steps of:  
generating the database at the trusted third party, the  
database including name and address information of the  
first one of the at least two entities and the  
universal identifier number uniquely identifying the  
10 first one, and not including corresponding confidential  
information of the first one, and distributing, before  
the confidential information generating step, the  
database so as to facilitate access to the database by  
the second one of the at least two entities.

15 Further objects, features and advantages of the present  
invention will become apparent from the following  
description of the preferred embodiments with reference  
to the attached drawings.

20

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram of a conventional electronic  
bill paying system utilizing a bill pay service bureau;

25

Fig. 2A is a block diagram of the electronic banking  
system according to the present invention;

Fig. 2B is a block diagram of the structure of the  
30 payor station according to the present invention;

Fig. 2C is a block diagram of the structure of the  
computer system resident at payor's bank;

35 Fig. 2D is a block diagram of the structure of the  
computer system resident at the trusted third party.



- 15 -

Fig. 3 is a diagram illustrating the operation of the payor's home banking system in an embodiment of the present invention;

- 5 Fig. 4 illustrates the operation of the token encoding process that takes place at the payor's home banking system;

Fig. 5 illustrates the format of the database  
10 descriptor;

Figs. 6(a) and 6(b) illustrate the format of a database payee record;

- 15 Fig. 7 is a diagram illustrating the flow of information into and out of the trusted third party;

Figs. 8A and 8B show an example of descriptor inclusion and shifting of over-descriptors, respectively;

- 20 Fig. 9 is a flowchart illustrating the logical flow of the check for descriptor inclusion;

Fig. 10 is a flowchart illustrating the match program  
25 executed at the trusted third party;

Fig. 11 is a program and data flow diagram illustrating a batch matching job at the trusted third party; and

- 30 Fig. 12 is a flowchart illustrating the descriptor generator program resident at the trusted third party.

- 16 -

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

I. Electronic Funds Transfer

5 The electronic funds transfer method and system according to the present invention will now be described in accordance with a preferred embodiment. Although the system is described herein as it relates to home banking, it can be used by any party wishing to  
10 initiate payments electronically, preferably through the Automated Clearing House (ACH) network, for example by means of the New York Automated Clearing House, which is trusted to have access to account information for all customers of its member banks. Moreover, the  
15 method is not limited to a method of transferring funds but may be utilized for any application that requires a correlation between two entities in which confidential information is to be made known only to a trusted third party intermediary.

20 The ACH network is a low-cost electronic payment mechanism that can be used efficiently to pay both individual consumers and companies, regardless of size. The system is flexible and highly reliable and  
25 incorporates the use of national standards. In order to use the ACH network, bank routing information and the payee (demand deposit account (DDA) identifier) account number must be supplied. This information must either be supplied by the initiator of the payment, or  
30 must be retained by the banking system of the payor ("home banking system"). This presents a major problem that inhibits widespread use of the ACH since bank routing and account information of the payee is rarely conveyed to payors for use in initiating payment  
35 instructions since this information is not generally disseminated. Banks also are often reluctant to share this information with unrelated third parties,

- 17 -

including other banks. At best, therefore, most payors only know the payee's name and address, and, in certain situations, such as where an ongoing relationship exists, the C-B account number.

5

The present invention solves this problem by making use of the facilities of a trusted third party (TTP) intermediary, preferably an automated clearing house, such as the NYACH, to gain easy access to the ACH  
10 network by home banking systems, while maintaining transparency to the end user.

To achieve this goal, a database of, among other things, payee name, address, routing number, DDA  
15 account number, and preferably taxpayer ID information, is developed that enables home banking systems, previously provided with information from the database that does not include the routing number and DDA account numbers, to generate ACH messages uniquely  
20 identifying the biller to the TTP and that can be translated by the TTP to bank routing and account information, thus facilitating use of the ACH to effect payments without unnecessarily distributing the routing number and account number information.

25

The technology used to develop the system is adapted from the Clearing House Interbank Payments System (CHIPS) Universal Identifier (UID) database system. CHIPS, established in 1970, processes international and  
30 domestic payments electronically and is the foremost means of transferring U.S. dollars among world banks. In the CHIPS a universal identifier number is utilized that uniquely identifies individual customer accounts. The CHIPS UID number is a six-digit number that is used  
35 to identify named accounts at depository institutions on the CHIPS system, uniformly across the system, since CHIPS' inception in 1970.

- 18 -

In the present invention, a universal identifier (UID) number, not necessarily or preferably corresponding to the CHIPS format, is assigned to correspond to each biller. The TTP, and only the TTP, can correlate the  
5 biller's UID with the biller's routing number and account number. However, as will be described in detail below, since a database containing the biller names and addresses, and associated UID's, has been distributed to the home banking systems, the home  
10 banking systems, using software supplied by the trusted third party, can produce a UID when supplied by a party initiating payment with the biller's name and address. A home banking system of the party initiating payment can then create ACH payment messages, for example, in  
15 customer initiated entry (CIE) format, for consumer to business transactions, and in PPD format, for business to consumer transactions, from payor-initiated instructions without having access to biller bank routing and account number data, and forward these to  
20 the TTP, trusted by all participants to hold onto this data, whose computer system will interpret the received message to determine the bank routing and account number of the biller to whom payment is to be sent. Message formats for ACH transactions are set forth in  
25 "1998 ACH Rules", available from the National Automated Clearing House Association, 607 Herndon Parkway, Suite 200, Herndon, VA 20170, starting at page OR 28.

A CIE entry is defined as a credit entry initiated by  
30 or on behalf of the holder of a consumer account to affect a transfer of funds to the deposit account of the Receiver. "CIE+" is a CIE entry with one addenda record. A PPD entry is defined as a credit or debit entry (other than MTE or POS entry) initiated by an  
35 organization pursuant to a standing or single entry authorization from a Receiver to effect a transfer of

- 19 -

funds to or from a consumer account of the Receiver.  
"PPD+" is a PPD entry with one addenda record.

An ACH message normally includes, among other things,  
5 an account number field and a routing number field. To  
implement the present invention, a UID number,  
previously assigned by the TTP and uniquely identifying  
the biller, is placed by the home banking system in the  
account number field of an ACH message and a special  
10 identifier flag, e.g., all 9's, is placed in the  
routing number field to identify the message as one  
requiring special treatment. The TTP recognizes the  
special identifier flag is present in the routing  
number field, indicating to the TTP receiving the ACH  
15 message that special treatment of the message is  
necessary. The trusted third party then performs a  
lookup of the actual routing number and account number  
at a central database using the supplied ACH UID,  
substitutes the stored routing and account numbers that  
20 correspond to the UID into the ACH message for the  
special identifier and received UID, respectively, and,  
once the substitution has been made, completes  
processing of the payment through the ACH network in  
the same manner as any other ACH transaction. The  
25 result is an electronic payment received in a timely  
and accurate fashion at reduced cost to the originating  
financial institution. Advantageously, in the present  
invention the payor's home banking system knows the  
UID, but does not know the biller's account/routing  
30 number, increasing the confidentiality of the system.

A preferred embodiment of the system for implementing  
the present invention will now be discussed with  
reference to Fig. 2A. As shown in Fig. 2A, the system  
35 components include the entity initiating payment 10  
(the "consumer" or "payor"), the consumer's bank C 12  
(payor's home banking system), trusted third party

- 20 -

(TTP) 13, payee's Bank B 16, and payee B 11. The entity initiating payment 10, is equipped with a payor station 30, preferably consisting of a personal computer and modem for electronically communicating  
5 over a phone line, although the payor station may comprise an ATM or a telephone touch-tone key pad, or other similar device.

Fig. 2B illustrates the components of the payor station  
10 30 in block diagram form. The payor station 30 includes a CPU 31 that performs processing functions. The payor station 30 also includes a read only memory 32 (ROM), which stores at least some of the program instructions to be executed by CPU 31, such as portions  
15 of the operating system or basic input-output system (BIOS), and a random access memory 33 (RAM) used for temporary (e.g. scratchpad) storage of data.

The payor station 30 also includes customer network  
20 interface 72 which enables the payor station 30 to communicate with external devices. In particular, the data network interface 72 enables communication between the payor station 30 and bank C (which constitutes the payor's home banking system), more specifically bank  
25 computer system 40. The interface preferably comprises a modem and a dedicated telephone line. However, other network interfaces, such as an ISDN terminal to interface with an ISDN network, or an Internet interface, may be used as well.

30  
A data storage device 34 is provided to allow for storage of data. Data storage device 34 may be written to or read from by the CPU 31. Data/Address bus 37 connects the ROM 32, RAM 33 and data storage device 34  
35 to the CPU. A keyboard 35 is provided to receive input from the payor 10. Input from the payor 10 may be provided instead by a mouse (not shown), or by any

- 21 -

conventional method of operator input. A display 36 is provided for conveying information to the operator of the payor station 30.

- 5 To initiate payment of an outstanding debt to payee B 11 in this embodiment, payor 10 sends, by means of payor station 30's network interface, a payment order to bank C 12, which is received by bank computer system 40. The payment order preferably includes payee name  
10 and address information, the amount to be paid, and optional reference data identifying the payor. In a case where an ongoing relationship exists between the payor and the payee, the payor's account number can be used to identify the payor. Where no such ongoing  
15 relationship exists, the payor's name may be employed as the optional reference data.

Bank C 12 is equipped with a computer system 40, which is illustrated, in block diagram form, by Fig. 2C. As  
20 shown in Fig. 2C, bank computer system 40 preferably includes a CPU 41, ROM 42 and RAM 43. Bank computer system 40 also includes a customer network interface 82, to enable electronic communication with the payor station 30 over a phone line, ISDN network, or via the  
25 Internet, and an ACH data network interface 83, to enable communication over the ACH network, in particular with the trusted third party computer system 50 resident at the trusted third party 13. Bank computer system 40 includes a data storage device 44 on  
30 which is stored a token/descriptor database 15 that has previously been supplied by the TTP. Data/address bus 45 connects the ROM 42, RAM 43 and data storage device 44 to the CPU 41.

- 35 Fig. 2D illustrates the trusted third party computer system 50, resident at the trusted third party 13. The trusted third party computer system includes a CPU 51,

- 22 -

a ROM 52, a RAM 53 and a data storage device 54. Data/address bus 55 connects the ROM 52, RAM 53 and the data storage device 54 to the CPU 51. An ACH data network interface is provided which enables

- 5 communication over the ACH system, in particular with the bank C 12 and biller's bank B 16, as well as any institution on the ACH network.

Although the connections between the bank C computer  
10 system and the TTP, as well as the connection between the TTP and biller's bank B are illustrated in Fig. 2A as direct connections, in actual practice, electronic communication between these parties may utilize intermediate ACH operators between the parties to  
15 facilitate the communication. Any reference to electronic communication between the parties is intended also to cover communication through such intermediaries.

- 20 Token/descriptor database 15, resident in the data storage device 44 of bank C's computer system 40, includes descriptors with encoded keys corresponding to the name and address tokens of each of the billers supplied by participating banks. Software, also  
25 supplied by the TTP, resident on bank C's computer system 40 associates the name and address transmitted by the payor with the account of a particular biller. This is achieved by first forming a descriptor data structure corresponding to the information input by the  
30 payor and then finding a match from among the descriptors stored in the resident token/descriptor database that has been previously supplied by the TTP. The database descriptors stored in the token/descriptor database each have appended thereto, or associated  
35 therewith, among other information, a universal identifier number (UID), previously generated by the TTP, that uniquely identifies the payee so that when a



- 23 -

- match is found between the descriptor generated in response to the input name and address and one of the descriptors stored in the token/descriptor database, the UID for the payee is identified. Each participant
- 5 in the instant electronic funds transfer system, such as bank C, is supplied with the token/descriptor database to allow payments to be made by and to customers of the respective banks.
- 10 The software supplied to bank C by the TTP and resident in bank C's computer system 40 identifies the corresponding UID by means of a process illustrated in Fig. 3. As shown in that figure, after the payor has transmitted the name and address information of the
- 15 biller (preferably together with the amount to be paid and the optional reference data) at S10, the name and address are tokenized, that is, broken down into constituent non-blank character strings (tokens) and encoded at S20. This is done by the process shown in
- 20 Fig. 4. As shown in Fig. 4, the text input by the payor (which constitutes a payment field) is scanned at S20A until a blank character is located. The non-blank character string preceding the blank forms the first token. The process is repeated until all the input
- 25 text has been tokenized.

- Once the input characters have been tokenized, the tokens for the name, address and city entries are encoded at S20B to form encoded keys. Encoding of the
- 30 tokens involves assignment to each token a corresponding number, or encoded key, as it will be referred to hereinafter. Once the tokens have been encoded, the encoded keys are placed in the various fields of the descriptor array (name and address and
- 35 city) at S20C, the encoded keys resident in each descriptor field group are then sorted at S20D, by any conventional sorting method, so that the highest values

- 24 -

of the encoded keys, corresponding to the rarest words, are placed first within that group. State information is not encoded but is stored as alphanumeric information corresponding to the two-letter designation  
5 for the state used by the U.S. Postal Service. Five-digit and four-digit zip codes are also not encoded but simply stored in respective fields as numerical entries.

- 10 For encoding, it is preferable that most commonly used words have associated keys available in a lookup table. Such a lookup table contains a list of tokens, and in a second field, a number associated with each token. Encoding is the most processor-intensive part of the  
15 name identification system. The inventors have achieved satisfactory performance from an encoding procedure based on a binary search preceded by table lookup of the first two characters of the token.
- 20 Preferably, text input by the payor is subjected to preprocessing before encoding. Such preprocessing includes: (a) replacing special characters with space or null; (b) closing up (eliminating) null characters; (c) combining adjacent isolated single characters into  
25 a single token (e.g., I B M becomes IBM); (d) reducing multiple spaces to a single space; and (e) changing all letters to uppercase.

- Comparing encoded descriptors instead of using text  
30 comparison advantageously reduces descriptor size, since certain words, such as "noise" words (i.e., words that do not assist in identifying a name), are never placed in the descriptor, and simplifies code, at least because number-encoded values can be stored in fields  
35 of fixed size, permitting more efficient machine code for the matching process.

- 25 -

- Due to practical limitations on the size of the token list (lookup table), for certain rare words, it may be more efficient to perform encoding by means of a hashing function that will, for any token, always
- 5 assign it the same number (i.e., key). Such a function would be used both at the trusted third party for generating the token data base in the first place, a process described further below, and at the bank C for encoding the name and address information input by the
- 10 consumer. All tokens encoded by the hashing technique will be considered rare and will have encoded values larger than the values assigned to tokens in the token lookup table.
- 15 The process for matching the generated descriptor with the corresponding stored descriptor at payor's home banking system will now be described. As illustrated in Fig. 3, once the input name and address data has been tokenized and encoded, the generated payment party
- 20 descriptor must be compared at S30 to the resident database 15 containing descriptor records of all participating payees to determine if there is a match. It is very important at the payor's home banking system (bank C) to avoid a false positive match between the
- 25 descriptor generated from the data input by the consumer and the descriptors resident in the token/descriptor database, since such a match would result in payment being made where one was not intended. Accordingly, the preferred method of
- 30 matching at the bank C is exact matching. In this method, for each field, a predetermined first number of the encoded keys are compared and must match exactly for a match to be declared for a given field.
- 35 The descriptor format includes at least the following fields, some of which may be empty:

- 26 -

- (1) Name of the individual or business
- (2) Several address lines
- (3) City
- (4) State
- 5 (5) Five-digit zipcode
- (6) Four-digit zipcode extension

Fig. 5 is a simplified representation of a database descriptor. Each such descriptor is generated at the  
10 TTP, in a manner to be discussed in further detail below, and supplied to each participant, such as bank C, as part of the token/descriptor database. Fig. 5, illustrates how the name, address and city information is encoded, that is, assigned encoded keys. In the  
15 example shown in the figure, the payee is National Mortgage Bank. For the name field, the word "Bank" is assigned the number 1, the word "National" is assigned 50, and "Mortgage" is assigned 60. The least commonly used words are assigned the highest numbers and placed  
20 first in the descriptor array, as shown in the figure. The same process is performed for the address, and city fields. Each descriptor also includes appended thereto the UID corresponding to the biller, as well as other information.

25

In response to the input of name and address information by the payor, a payee name and address descriptor is generated by the bank C. A simplified representation of a payee name and address descriptor  
30 is shown in Figs. 6(a) and 6(b) for the same payee as the one represented by the database descriptor shown in Fig. 5.

Fig 6(a) shows the characters input by the consumer in  
35 the various fields of the descriptor. Fig. 6(b) shows the descriptor generated by the encoding and sorting programs resident on the bank's computer system. As

- 27 -

can be seen from Figs. 5 and 6(a)-(b), descriptors corresponding to the biller should be identical in each name and address field, that is, should exhibit an exact match.

5  
Returning to the flowchart of Fig. 3, if a match is found during the comparison between the generated descriptor and one of the database descriptors, that is, if a database descriptor exists that exactly  
10 matches the generated payment party descriptor, the UID associated with the database entry is returned at S40 and is placed into an ACH record. These records are incorporated into a file of ACH transactions that is then transmitted to the trusted third party for further  
15 processing at S50 and S60. If a match cannot be found, existing procedures for generating payments would be followed (not shown).

Two name descriptors are considered to match if an  
20 initial minimum number of keys are equal. (The minimum number may be set to the maximum if it is desired to force exact matching.)

Note that since the keys that are required to match are  
25 those at the left ends of the two key groups, those keys are also the rarest keys in the groups, since encoded token numbers occur in decreasing order within a descriptor. Therefore, tokens with the highest encoded token numbers, which are the least common and  
30 most significant, occur first.

Similarly, two address descriptors are considered to match if an initial minimum number of keys are equal. The same is true with the city descriptors. The  
35 inventors have achieved good results with a minimum number of three was chosen for the name and the address

- 28 -

descriptors, and one as the minimum for the city descriptor.

In a variation of the preferred method, the principle  
5 of inclusion might be used also in authorizing  
payments. In such a variation, a payee name and  
address would be required to include a database  
descriptor in order to effect a match. Database  
descriptors would be structured to include the minimum  
10 number of essential tokens from each name and address  
field. In this variation, additional checking would be  
needed to guard against payee descriptors with  
excessively many additional keys, or with rare  
additional keys. The weakest feasible additional check  
15 would be to require that the payee descriptor may  
include, as a set, at most one database descriptor.

#### Name and Address Fields

- 20 The trusted third party maintains the database  
containing records for customers of the participating  
financial institutions, the billers in the system of  
the present invention. These records include the  
following fields, some of which may be optional:
- 25
- (1) Name of the individual or business
  - (2) Several address lines
  - (3) City
  - (4) State
  - 30 (5) Five-digit zipcode
  - (6) four-digit zipcode extension
  - (7) Identifier of the financial institution
  - (8) Biller's account number
  - (9) Universal Identification Number (UID), assigned by  
35 the trusted third party
  - (10) E-mail address
  - (11) Taxpayer ID.

- 29 -

Note that items (7), (8) and (11) are not distributed to participating banks as part of the token/descriptor database, and item (10) will only be distributed with proper authorization.

5

The following record layout for a bank customer field is a layout that may be used to model some of the techniques described here. Customer Free Format is a number 1 or 2 indicating whether the next five fields will be treated as a free-form name group or as the five distinct fields shown.

	CUSTOMER FREE FORMAT	PIC 9(01)
	CUSTOMER LAST NAME	PIC X(30)
15	CUSTOMER FIRST NAME	PIC X(12)
	CUSTOMER MIDDLE NAME	PIC X(12)
	CUSTOMER NAME PREFIX	PIC X(08)
	CUSTOMER NAME SUFFIX	PIC X(08)
	CUSTOMER ADDRESS 1	PIC X(31)
20	CUSTOMER ADDRESS 2	PIC X(31)
	CUSTOMER ADDRESS 3	PIC X(31)
	CUSTOMER CITY	PIC X(20)
	CUSTOMER STATE	PIC X(02)
	CUSTOMER ZIP5	PIC 9(05)
25	CUSTOMER ZIP4	PIC 9(04)
	CUSTOMER ACCOUNT NUM	PIC 9(18)
	CUSTOMER DFI IDENTIFIER	PIC 9(09)
	CUSTOMER UID	PIC 9(10)
	CUSTOMER E-MAIL	PIC X(34)
30	CUSTOMER TAXPAYER ID	PIC 9(16)

A layout for the generated descriptor file follows.  
The PIC X(03) key fields are treated as 24-bit binary numbers to provide a large number of possible values.

35

DESCRIPTOR NAME KEY	PIC X(03) OCCURS 8
---------------------	--------------------

- 30 -

	DESCRIPTOR ADDRESS KEY	PIC X(03) OCCURS 8
	DESCRIPTOR CITY KEY	PIC X(03) OCCURS 2
	DESCRIPTOR STATE	PIC X(02)
	DESCRIPTOR ZIP5	PIC 9(05)
5	DESCRIPTOR ZIP4	PIC 9(04)
	DESCRIPTOR ACCOUNT NUM	PIC 9(18)
	DESCRIPTOR DFI IDENTIFIER	PIC 9(09)
	DESCRIPTOR UID	PIC 9(10)
	DESCRIPTOR E-MAIL	PIC X(34)
10	DESCRIPTOR TAXPAYER ID	PIC 9(16)

The notations on the right are in COBOL syntax. The numbers within parentheses show field size. These sizes are illustrative only. Fields with a 9()  
 15 specification are numeric, while those with an X() specification are alphanumeric. "OCCURS" shows that the field is repeated some number of times.

The DESCRIPTOR NAME KEY items are encoded keys formed  
 20 from a CUSTOMER name, using the fields from CUSTOMER LAST NAME through CUSTOMER NAME SUFFIX. DESCRIPTOR ADDRESS KEY items are encoded keys formed from CUSTOMER ADDRESS lines 1 through 3. DESCRIPTOR CITY KEY items are encoded keys formed from the CUSTOMER CITY field.  
 25 The remaining descriptor items are identical to the corresponding items in the CUSTOMER record.

These layouts are merely an example of the type of record layouts that may be used.

30

Finally, in any of the variations above, the definition of match may be relaxed so that two name and address descriptors are regarded as matching if the name descriptors match and one of the following three cases  
 35 holds:



- 31 -

- (1) Address, city and state match; or
- (2) Address and zip5 match; or
- (3) Zip 5 and zip4 match.

5 This criterion is illustrative only. The bank could  
alter the exact rules that it chooses to use. There is  
no need for all participating banks to adopt precisely  
the same criterion for a match. Only those procedures  
of the banks affecting the operations at the trusted  
10 third party need to be standardized; any materials  
furnished by the trusted third party to the banks to  
help them to implement the system would also be  
uniform.

15 In the normal course of events, once the payor's  
entered name and address have been tokenized, encoded,  
and a match found in bank C's descriptor database, UID  
payments from bank C are transmitted to the trusted  
third party as part of files of other ACH transactions  
20 already originated by participating financial  
institutions. As was discussed above, the ACH message  
format is altered in the present invention to  
substitute the UID in place of the account number. A  
special identifier flag, for example all 9's, is  
25 substituted for the routing number. After a UID is  
received by the TTP from the payor's home banking  
system and recognized as such by the presence of the  
special identifier, it is used by the TTP, and  
particularly by the trusted third party computer system  
30 50, to retrieve from the TTP's central database 14 the  
payee's bank routing and account number. Once this  
information has been ascertained, the routing and  
account numbers are substituted for the special  
identifier and UID, respectively, and the message is  
35 transmitted to payee's bank B 16, crediting payee's  
bank account for the amount to be paid by the entity  
initiating payment.

- 32 -

The retrieval involves a lookup, performed by the trusted third party computer system 50 in the central database 14, and substitution in the ACH message of the UID supplied by bank C with the payee's account number and the special identifier with the routing/transit number of the payee's bank B. After the substitution is made, the transaction takes the same route as any other ACH transaction in the ACH network.

10 Because the trusted third party previously has been supplied with all the payee account numbers, neither the payor nor bank C need know payee's bank account number or the bank the payee uses.

15 Database Maintenance at Trusted Third Party

For the present invention to work properly, bank customers must be able to be reliably identified by their name and address information. To make the system work at a suitably high confidence level, database maintenance carried out at the trusted third party is utilized to ensure that the confusion of one name and address with another will rarely occur.

25 As was discussed above, the database is updated periodically as needed to make sure the customer name and address information is kept up to date, as well as to take into account additional participating banks. However, checking for name similarity at database update time cannot, by itself, ensure that such confusion does not occur. The maintenance program can only compare names and addresses that already have been entered into the system; it cannot know whether customers of banks not yet in the system may have name and address fields similar to some currently on file. However, if an effort is made to bring as many banks and institutions as possible in a given area into the

- 33 -

system during a given time period, then the likelihood of errors from this source will be minimized. Use of taxpayer ID would also prevent such errors.

## 5 Maintenance Design Goals

The maintenance goals given below reflect a concern for potential problems that might become important when the database becomes very large, with perhaps tens or  
10 hundreds of millions of entries. The design goals include:

- 15 (A) Every Name/Address (N/A) must be associated with exactly one UID. Personal or business N/A's with several accounts would have a UID associated only with one account, usually the first one entered into the system. UID's could be associated with each of several accounts for the same legal entity, as specified by rules that may be adopted,  
20 provided that means are supplied to distinguish the N/A fields in some way, for example by the addition of box or department numbers.
- 25 (B) Pursuant to (A), the system must establish with confidence that any two N/A's in the database are in reality different. This will be referred to as the identity problem. Again, use of taxpayer ID would resolve the identity problem.
- 30 (C) The subset/superset problem: This is the problem of determining whether, given any two corresponding fields of two N/A records, the set of tokens in the field of the first record is a subset of the set of tokens in the corresponding  
35 field of the second. In such a case, the first record will be called a subset of the second. The records of such a pair may easily be confused,

- 34 -

since merely omitting one or more keys from one N/A could produce the other. If the two records have the same zipcode, then the situation must be reported to the financial institutions involved in a warning report. It may also be desirable to postpone assigning a UID to a new entry that has this relationship with an existing record. If the zipcodes are different, the two entries could be flagged so that home banking customers (i.e., payors) would be required to supply a zipcode with either of these two N/A fields. The warning to the financial institution might be omitted in this case.

(D) The phonetic misspelling problem: This is the problem of determining whether two distinct N/A entries in the database have descriptors consisting of the same phonetically encoded keys. One such phonetic encoding technique is Soundex. Then one N/A entry could be transformed into the other by misspelling one or more words in a phonetically plausible manner. Actions to be taken in such cases might be the same as in (C) above; or as determined by the governing body.

Note that (C) and (D) could occur together. That is, two N/A entries might fall into case C if certain words in the entries were plausibly phonetically misspelled. By using the methods to be described, both C and D as well as their combined manifestations can be detected.

The flow of information to be distributed among the participants that is required to implement the electronic funds transfer method and system of the present invention is shown at Fig. 7.

- 35 -

As shown in Fig. 7, trusted third party 13 is first supplied with customer account information from participating banks and other financial institutions. The central database 14 is generated, from the supplied  
5 information, and is resident in a computer system (not shown) at trusted third party 13.

The central database 14 stores, among other information, name and address information, taxpayer ID  
10 if available, bank routing/transit numbers and DDA accounts for all bank customers who are potential receivers of ACH payments. Participating banks supply this information to the trusted third party for inclusion in the database. Potential receivers of the  
15 ACH payments can be any customer of any participant.

Upon receipt by the trusted third party 13, the customer records are added to the central database 14. The name and address information supplied by  
20 participating banks forms a Customer Name and Address file at the TTP. This file is used by the TTP to create the descriptor database. A token list is formed from the name and address list. The list is in table form and includes a second column given the encoded  
25 value to be assigned to each token during encoding. This list is used at the TTP to encode each name and address and to form an associated descriptor. The collection of descriptors, with UID's assigned by the TTP appended thereto, is sent to banks, such as bank C,  
30 together with the token list (lookup table) to enable bank C to encode tokens corresponding to consumer-entered names and addresses and to compare the generated descriptor with those stored in the database of descriptors supplied by the TTP.

35

A key advantage of the present invention is that the routing numbers and account numbers are supplied by the

- 36 -

participating banks to the TTP but are not transferred to the various home banking systems, such as bank C. Note that bank C may function both as a participating bank and the home banking system.

5

The trusted third party database is periodically revised to include updates received from participating financial institutions. Home banking systems also preferably periodically receive updates to their token/descriptor database.

10

As discussed above, the test for a match at home banking systems, such as bank C, must be extremely strict, to avoid false matches. However, in reviewing the descriptor database of all customers, the TTP may utilize certain techniques which require less stringent matching criteria.

15

One such technique is descriptor inclusion. Descriptor inclusion may be utilized at the TTP to help ensure against the possibility that one name and address might be confused with another. Such confusion may occur if one set of keys includes another, so that merely omitting keys from one descriptor could produce the other.

20

25

If taxpayer ID is not available, then in generating the database 14 at the TTP, it is important that an inclusion check be made to see if matches exist between descriptors generated from different name and address information. For example, if one bank customer is "National Mortgage Bank", while another customer is "National Bank of Mortgage", because of the fact that the encoded keys for "National", "Bank" and "Mortgage" are present in the descriptors that would be generated from each name, it is possible that a false match could be declared at the bank. In order to prevent this

30

35

- 37 -

occurrence, it is advisable that when the database is generated at the TTP, an inclusion check is performed to determine whether such a situation exists. In order to keep the system free of such events, certain  
5 maintenance steps should be performed at the TTP.

Fig. 8A illustrates inclusion between name fields of two descriptors. As shown in the figure, each encoded key in the top descriptor field is included in the  
10 bottom descriptor field, which could lead to confusion if keys are left out for the customer represented by the bottom descriptor.

At the TTP, in order to check for the occurrence of  
15 inclusion in the descriptor database, the entire file of descriptors is sorted. To test for inclusion, the first descriptor is compared with, that is, an inclusion check, to be described below, is performed with each descriptor having the same first entry.  
20 Since, as in Fig. 8A, inclusion may exist even where first entries do not match, shifting of the first group in each descriptor is performed, as shown in Fig. 8B, so that each entry is placed first in one shifted version of the descriptor. All of the shifted  
25 descriptors are included in the sorted file of descriptors when the inclusion check is performed.

#### Shifted descriptors

To carry out a matching of a database descriptor file  
30 with itself to check for descriptor inclusion in batch mode, the file of including descriptors (overfile) is augmented to contain multiple descriptors for each of its N/A descriptors. The additional descriptors are produced by shifting the name group within the original  
35 descriptor left, one place at a time, dropping the most significant encoded key at each step. The file of descriptors not so augmented is referred to in the

- 38 -

following discussion as the "underfile". The test for inclusion determines which descriptors, if any, in the underfile exhibit inclusion with respect to the overfile.

5

In batch matching, two sorted files of descriptors are read in tandem, and records are compared only when their two first keys are equal. As a result, the number of pairs of descriptor records that must be  
10 compared is greatly reduced. However, unless the shifted descriptors are added to the file of including descriptors (overfile) as discussed above, many inclusions will be missed. This method yields good efficiency when inclusion checking is to be carried out  
15 for entire files using batch methods.

When the first of two descriptors is included in the second, the situation is as shown in Fig. 8A. In that figure, each key in the upper descriptor also appears  
20 in the lower descriptor. Fig. 9 is a flow chart showing the steps for a program that checks whether one descriptor, UNDERREC, from an underfile of descriptors, is included in another descriptor OVERREC from an overfile of descriptors. The program illustrated in  
25 Fig. 9 comprises the "have inclusion?" determination at S5 in the match program flowchart shown in Fig. 10 discussed below.

In Fig. 9, the key fields in the descriptors to be  
30 compared are indexed from zero. Index variable J is used for the UNDERREC and K is used to index the OVERREC. The "J too large" check is performed before the check for the value of UNDERREC[J].

35 Although a three-way diamond is used in the flowchart to reduce the number of blocks in the diagram, only a few computer languages (e.g., Fortran) actually permit



- 39 -

a three-way test in one statement. Therefore, the process shown by the three-way diamond would normally be implemented as two two-way tests.

- 5 A description of the logic of the flowchart shown in Fig. 9 is as follows:

First, for given values of J and K, the following assumptions (a) and (b) hold (note that they hold  
10 trivially when  $J=K=0$ ):

(a) For any  $J' < J$ ,  $\text{UNDERREC}[J'] = \text{OVERREC}[K']$  for some  $K' < K$  (where J is the current index value of the UNDERREC and J' is some previous index value  
15 of the UNDERREC and where K is the current index value of the OVERREC and K' is some previous index value of the OVERREC).

(b) For the current J, when the top diamond S200 in  
20 Fig. 9 is entered,  $\text{UNDERREC}[J]$  is a key that has not yet been found in OVERREC. This is true because no duplicated keys are present in any descriptor.

25 At step S100, index variables J and K are initialized to zero. At step S200 it is determined whether the currently indexed key of the UNDERREC is less than, greater than, or equal to the currently indexed key of OVERREC. If  $\text{UNDERREC}[J]$  is greater than  $\text{OVERREC}[K]$ ,  
30 then there can be no inclusion. This is because, as discussed above, each and every descriptor is sorted in descending order. Therefore, if this  $\text{OVERREC}[K]$  is smaller than this  $\text{UNDERREC}[J]$ , later members of OVERREC can only be smaller, and by assumption (b),  $\text{UNDERREC}[J]$   
35 has not yet been found in OVERREC.

- 40 -

If UNDERREC[J] is equal to OVERREC[K], then inclusion cannot so far be ruled out and the comparisons must continue. J is incremented and a check is made at S400 to see if any keys remain in UNDERREC to be compared.

5

If J is too large (index out of range) or UNDERREC[J] = 0, then there are no more nonzero keys in the UNDERREC to be compared and inclusion exists, otherwise, K is incremented at S600. A check is made, at S700 to

10 determine if any more nonzero keys remaining in OVERREC. If no more keys remain in OVERREC, there is no inclusion, by assumption (b). If more keys remain in OVERREC, the flow of operation returns to step S200.

15 If, at S200, UNDERREC[J] is less than OVERREC[K], the program immediately proceeds to S600 to increment the index value of OVERREC.

The following observations can be made with reference  
20 to assumptions (a) and (b):

When J is found to be too large, at S400, inclusion has occurred, since UNDERREC[J'] was a key found in OVERREC for all smaller J' by (a). Otherwise, (a) and (b) continue to hold for the  
25 larger value of J, since in order to increase J at S300 it must be true that UNDERREC[J]=OVERREC[K].

When K is increased at S600, it must be true that UNDERREC[J] has not been found in OVERREC, by  
30 assumption (b). So, if the new value of K is too large, there is no inclusion. Otherwise (a) and (b) continue to hold for the larger value of K, since UNDERREC[J] is not equal to OVERREC[K] before K is incremented.

35

If, at S200, UNDERREC[J]>OVERREC[K], then by (b) UNDERREC[J] has not yet been found in OVERREC.

- 41 -

This OVERREC[K] is too small to equal UNDERREC[J], and later members of OVERREC are even smaller. So there can be no inclusion.

- 5 The match program compares two files of descriptors, the overfile and the underfile, and finds all pairs of records (matches) such that the underfile descriptor is included in the overfile descriptor. Fig. 10 is a flow chart illustrating operation of the match program.
- 10
- For a match to be declared, the name, address, and city groups must all be pairwise related by inclusion. The state and zipcode records must simply be equal, or be "close" as defined by a criterion such as those
- 15 discussed above.

In general, the flowchart can be viewed as consisting of:

- (a) An outer loop that performs a serial read of the overfile of including descriptors.
- 20
- (b) An inner loop in which a comparison is made of each overfile record with all records of the underfile that have the same first key as the overfile descriptor. This inner loop has loop
- 25 index R. REC is the actual key (record number) of the first record of the underfile that has the same first key as the current overfile record. It is incremented only when the inner loop has
- 30 completed. At each step of the inner loop:
- (b.1) R is used as the actual key of the underfile.
- (b.2) For each such underfile record, a check for inclusion ("have inclusion?") is performed.
- 35 This block is detailed in Fig. 9.

- 42 -

(b.3) When there is inclusion, a match record giving both sequence numbers is written. However, output of the match record is suppressed if the matching records are the same record, that is, have the same account number at the same bank.

Fig. 11 is job flow for a batch matching job. The descriptor generator is described above; it generates the two descriptor files. The file containing shifted descriptors is used as the file of including descriptors, i.e., the over-file. The other descriptor file is used as the underfile of included descriptors in the match. Both descriptor files are in sorted order at the start. In this sort, the entire record is used as sort key, and the sort is in ascending order.

The match program (described in detail in Fig. 10) finds all pairs of descriptors from the two files such that the under-descriptor record is included in the over-descriptor record. Pairs with identical under and over records are suppressed; they are the trivial inclusions of a descriptor in itself, and so are not significant.

The resulting match records need contain only sequence numbers from the two matching records.

A variation using the U.S. Government Standard Hashing Algorithm (SHA) to hash the descriptors will now be discussed. It may be considered desirable to use hashed descriptors (via SHA) to reduce the dispersal of customer information among the various banks and to reduce the size of the descriptor record. This would entail hashing the entire descriptor as a whole. However, any such use of hashing introduces some minute additional risk of misidentification, since distinct

- 43 -

descriptors could theoretically map to the same hash value. This minute additional risk can probably be more than offset by increasing the maximum number of encoded keys in the pre-hashed descriptor, thus

- 5 reducing the possibility of error due to the maximum descriptor size being exceeded. Since SHA reduces the descriptor to a fixed maximum size, this pre-hashed increase in size carries a cost only to the TTP, not to the participants.

10

- The main disadvantage of using hashing in this manner is that the only matching criterion that can be used at the banks with a hashed descriptor is exact (all or nothing) matching. No more subtle comparisons, such as
- 15 partial equality, inclusion, or distance methods, would be possible.

#### Distance Functions

- 20 A variation on the subset/superset problem discussed above will now be discussed. The goal is to provide a way to ensure that names of distinct UID's will not be confused.
- 25 The N/A subset relationship described in (C) above can be generalized. Consider distance functions, also called a metrics. Given two sets S and T, the set difference S-T consists of those elements of S that are not also in T. Let  $\#(S-T)$  denote the number of
- 30 elements in this set. Then

Define:  $\text{dist}(S,T) = \#(S-T) + \#(T-S)$

- This defines a metric that measures the distance
- 35 between the two sets in a particular sense. Metrics are a standard mathematical device having the following three properties:

- 44 -

For all sets R, S, and T,

- (1) If  $\text{dist}(S, T) = 0$  then  $S = T$ ,
- (2)  $\text{dist}(S, T) = \text{dist}(T, S)$
- 5 (3)  $\text{dist}(R, S) + \text{dist}(S, T) \geq \text{dist}(R, T)$  [ $\geq$  is read "is greater than or equal to"]

The function defined above satisfies these conditions. There are many variations on this definition that also  
10 satisfy the three conditions. For example, defining

$$\text{dist2}(S, T) = \max(\#(S - T), \#(T - S))$$

yields another function  $\text{dist2}$  which also satisfies (1)  
15 through (3).

Even better metrics may be defined using the relative frequencies of the tokens. Rather than counting the tokens in the difference sets with "#", one adds the  
20 negative logarithms of the relative frequencies of the tokens in these difference sets. In this way rare words will contribute more to the distance than common words.

25 Having made such a definition, it may then be asked for any name and address entry in the database: What is the minimum distance from this entry to another entry? The greater this minimum distance, the smaller is the chance that a user error can transform one entry into  
30 the other. If necessary, in a variation of this system the techniques of (C) and (D) above could be modified to report any instances where entries closer than a given minimum distance exist in the database. Each positive result could trigger the same actions  
35 described there.

Encoder Maintenance

- 45 -

Encoder features are preferably fixed once and for all, as far as is possible. This is because changing the encoding table forces changes to the entire file of encoded descriptors. Thus, encoder table changes would  
5 be made only at infrequent intervals when considerable computer resources and time are available to compute new codes for all records.

The main features of the simple encoder supplied to  
10 participating banks are the ability to:

- (1) supply a token with an encoded value stored in a field of fixed size within the computer,
- (2) define synonyms and noise words with the same  
15 encoded value or no encoded value, respectively, and
- (3) indicate the relative rarity of the more common words for use in ordering keys within a  
20 descriptor.

All of these features are embodied in the assignment of encoded values to tokens. In particular, lower encoder values usually indicate a more common token. Token number one should therefore be the most common token.  
25 However, this correspondence between encoded value and token frequency is not terribly critical. So, infrequent updates should be sufficient to ensure efficient operation.

## 30 II. Electronic Bill Presentment

In addition to facilitating payments to billers, the system of the present invention can also be used in reverse to allow billers to present bills to consumer's  
35 (potential payors). Such a system would utilize the UID database resident at the TTP to transmit an ACH message to the potential payor's home banking system.

- 46 -

In the bill presentment system, companies or individuals that wish to bill electronically send billing data to the TTP. The TTP uses the UID database to route these bills electronically to the home banking system to present the bills. The bills are delivered to the home banking system in ASC X12 format using the 810 or 811 transaction set.

The biller in this system delivers a file containing consumer bills in X12 format to the TTP. The TTP routes the consumer's bill in accordance with the routing information contained in the database. Optimally, this would involve routing the bill to the consumer's bank in X12 format. The consumer's bank routes the bill to its home banking system and presents it to the consumer using a proprietary (or open) interface that the bank uses to communicate with its customers.

If the consumer is willing to pay the bill, it would do so by flagging the bill for payment using the interface supplied by its bank. Since the bill was received by the bank in X12 format, it would be able to route the payment through the appropriate payment network.

Accompanying the payment would be X12 remittance data created from the original X12 invoice. Assuming the ACH network is used, the payment would be carried in either a Consumer Initiated Entry (CIE) or Corporate Trade Exchange (CTX) transaction. The accompanying X12 remittance would be appended to the CTX or CIE as addenda records. The payment would pass through the ACH network and be delivered to the biller's receiving bank. The receiving bank would credit the account of the biller, and pass the X12 remittance to the company.

As an alternative electronic bill presentment method, banks that do not currently offer home banking, do not



- 47 -

- want to develop bill presentment on their home banking systems, or simply want to provide multiple access methods for their customers, can offer bill presentment through the Internet. Such a web-based bill
- 5 presentment system would be customized for each participating bank. Consumers gain access to a bill presentment web site through the web site of the participating bank. Participating banks provide a link on their web page to the bill presentment web site.
- 10 The bill presentment web site may be managed by each individual bank, or operated by an automated clearing house, such as NYACH.

Where the web site is managed by the automated clearing

15 house, billers deliver information to the clearing house in the same manner as in the home banking bill presentment option discussed above. Instead of forwarding billing data to the participating bank's home banking system, data for each consumer is kept on

20 a secure system at the clearing house. This system is connected, off-net, to the web-based bill presentment server.

To utilize the system, a consumer logs in at the bill

25 presentment site, or alternatively, uses a secure browser and certificate issued by his or her bank. After being successfully authenticated at the bill presentment server, the consumer is shown a summary of bills available for payment. The consumer then may

30 click on any bill he or she wishes to examine. The bill presentment server then sends an inquiry to the clearing house system. The billing information is sent back to the bill presentment server, converted to HTML, and displayed to the consumer.

35

The consumer can then indicate a willingness to pay the bill by clicking on a payment icon associated with the

- 48 -

presented bill. Payment orders may be collected by the clearing house system, where they can be converted into an ACH payment in consumer initiated entry (CIE) format, or corporate trade exchange (CTX) format.

- 5 These ACH payments are forwarded in batches to the consumer's bank for balance verification and origination into the ACH network.

- 10 The embodiments discussed above are illustrative and are not intended to limit the scope of the present invention to the particular method of (or system for) carrying out the invention described therein. The scope of the invention is to be interpreted broadly, in view of the appended claims.

- 49 -

WHAT IS CLAIMED IS:

1. A funds transfer system for facilitating electronic funds transfer between a payor and a payee by means of an intermediate trusted third party, said system comprising:

a payor station including a device for electronic communication of a payment order, said payment order comprising the payee's name, address and an amount owed by the payor to the payee;

a home banking system including a computer structured to communicate electronically with the payor station, to receive the payment order, and with the trusted third party;

a trusted third party system associated with the trusted third party, said trusted third party system comprising a computer structured to communicate electronically with both the home banking system and a bank of the payee;

said home banking system computer being operable, upon receipt of the payment order from the payor station, to generate a universal identifier number uniquely identifying the payee and to transmit electronically the universal identifier number to the trusted third party via a communication with the trusted third party system; and

said trusted third party system computer being operable, in response to receipt of the universal identifier number from the home banking system, to identify the payee as a party to receive payment, to generate a routing/transit number of the bank of the payee and the payee's account number from the universal identifier number, and to communicate electronically

- 50 -

with the bank of the payee to facilitate transfer of the amount owed to the payee's account to the bank of the payee.

2. A funds transfer system according to claim 1, wherein the home banking system computer has stored therein a database, supplied by the trusted third party, including name and address information of the payee and the universal identifier number, and not including corresponding routing/transit number, account number and taxpayer ID information of the payee.

3. A funds transfer system according to claim 2, wherein said home banking system computer is operable to generate the universal identifier number as part of at least one ACH message, together with a special identifier.

4. A funds transfer system according to claim 3, wherein the trusted third party system computer is operable to identify the payee's routing/transit and account number using the received universal identifier to facilitate the transfer of the amount owed to the payee's account.

5. A funds transfer system according to claim 4, wherein said home banking system computer is operable to generate the ACH message such that the universal identifier number resides in an account number field and the special identifier resides in a routing/transit number field; and wherein the trusted third party system computer further comprises:

means for recognizing the ACH message that includes the special identifier as a message requiring special handling; and

means for substituting respectively the payee's account number and payee's bank routing/transit number

- 51 -

for the received universal identifier and special identifier in the ACH message.

6. A funds transfer system according to claim 2, operable with at least one participating institution, the payee being one of a plurality of customers of the one participating institution, and wherein the name and address information in the database comprises a descriptor for each of said plurality of customers of the at least one participating institution, each descriptor comprising numerical information corresponding to characters forming the name and address of one of the plurality of customers.

7. A funds transfer system according to Claim 6, wherein said payor station device communicates the payment order such that it comprises character information corresponding to the name and address of the payee; and wherein the home banking system computer comprises:

means for encoding the character information forming the payment by assigning a numerical value to identified nonblank character strings present in the character information;

means for forming a name and address descriptor using the encoded numerical values; and

means for comparing the formed name and address descriptor with the database descriptors until a match is found,

said home banking system computer being operable to transmit to the trusted third party the universal identifier number associated with the matching database descriptor.

8. A funds transfer system according to claim 7, wherein said home banking system computer is operable

- 52 -

to transmit the universal identifier number in at least one ACH message.

9. A funds transfer system according to claim 7, wherein said encoding means includes a lookup table to associate nonblank character strings with respective corresponding numerical values.

10. A funds transfer system according to claim 9, wherein said encoding means uses hashing to encode character strings corresponding to rare words.

11. A funds transfer system according to claim 3, operable with at least one participating institution, the payee being one of a plurality of customers of the one participating institution, and wherein the trusted third party has stored therein a master database containing previously collected information, including name, address, account number and routing number information of each of said plurality of customers of the at least one participating financial institution; and

wherein said funds transfer system includes means for forming the database stored in the home banking system computer from the master database.

12. A method for transferring funds electronically between a payor and a payee by means of an intermediate trusted third party, said method comprising the steps of:

upon receipt by the trusted third party of a universal identifier number uniquely identifying the payee and generated, in response to a payment order from the payor, by a home banking system of the payor from information stored on a database resident at the home banking system, finding, using a table lookup at the trusted third party using the received universal

- 53 -

identifier number as a key, a routing/transit number of the payee's bank and the payee's account number to identify the payee as a party to receive payment, the routing/transit number of the payee's bank and the payee's account number being known only to the trusted third party; and

communicating, by the trusted third party, with payee's bank to facilitate transfer of an amount owed by the payor to the payee to the payee's account in the payee's bank.

13. A method according to claim 12, further comprising the steps of:

generating the database at the trusted third party, the database including name and address information of the payee and the universal identifier number uniquely identifying the payee, and not including corresponding routing/transit number, account number and taxpayer ID information of the payee, and distributing, before said finding step, the database to the home banking system.

14. A method according to Claim 13, wherein the universal identifier is received by the trusted third party from the home banking system as part of at least one ACH message, together with a special identifier.

15. A method according to Claim 14, wherein the trusted third party identifies the payee's routing/transit and account number using the received universal identifier to facilitate the transfer of the amount owed to the payee's account.

16. A method according to Claim 15, wherein in the ACH message received from the home banking system the universal identifier resides in an account number field and the special identifier resides in a routing/transit

- 54 -

number field; the method further comprising the steps of:

recognizing, by the trusted third party, the ACH message that includes the special identifier as a message requiring special handling; and

substituting, by the trusted third party, respectively the payee's account number and payee's bank routing/transit number for the received universal identifier and special identifier in the ACH message.

17. A method according to claim 13, wherein the payment order from the payor comprises the payee's name, address and the amount owed by the payor to the payee.

18. A method according to claim 17, wherein the payee is one of a plurality of customers of at least one participating institution availing itself of said method and wherein the name and address information in the database comprises a descriptor for each of said plurality of customers, of the at least one participating institution, each descriptor comprising numerical information corresponding to characters forming the name and address of one of the plurality of customers.

19. A method according to Claim 18, wherein the payment order comprises character information corresponding to the name and address of the payee, and the home banking system performs the substeps of:

encoding the character information by assigning a numerical value to identified nonblank character strings present in the payment order character information;

forming a name and address descriptor record using the encoded numerical values;



- 55 -

comparing the formed name and address descriptor with the database descriptors until a match is found; and

transmitting to the trusted third party the universal identifier number associated with the matching database descriptor.

20. A method according to claim 19, wherein said generating step subjects each database descriptor to a hashing algorithm and after said forming step the formed named and address descriptor is subjected to the hashing algorithm, and wherein the comparing step compares the hashed value of the name and address descriptor with the hashed values resident in the database.

21. A method according to claim 19, wherein in said transmitting substep, the home banking system transmits the universal identifier number in at least one ACH message.

22. A method according to claim 19, wherein in said encoding substep, a lookup table is used to associate nonblank character strings with respective corresponding numerical values.

23. A method according to claim 22, wherein the encoding substep uses a hashing algorithm to encode character strings corresponding to rare words.

24. A method according to claim 14, wherein the payee is one of a plurality of customers of at least one participating institution availing itself of said method and wherein the trusted third party performs the step of previously collecting information including name, address, account number and routing number information of each of said plurality of customers, of

- 56 -

the at least one participating financial institution for use in generating a master database, resident at the trusted third party, from which the distributed database is formed.

25. A funds transfer system for facilitating electronic funds transfer between a home banking system of a payor and an account of a payee, said system comprising:

a trusted third party structured to communicate with both the home banking system and a bank of the payee maintaining payee's account,

means associated with said home banking system for transmitting a universal identifier number to said trusted third party in response to receipt by said home banking system of a payment order from the payor, said universal identifier number uniquely identifying the payee;

means associated with said trusted third party operable in response to receipt of the universal identifier number from the home banking system to identify the payee as a party to receive payment, and for converting the universal identifier number so as to identify the routing/transit number of the payee's bank and the payee's account number; and

means associated with said trusted third party for communicating with payee's bank to facilitate payment in accordance with payor's payment order to payee's account.

26. A method for electronic bill presentment between a biller and a payor by an intermediate trusted third party, said method comprising:

generating, by the trusted third party, a database including name and address information of the payee and a universal identifier number uniquely identifying the

- 57 -

payee, and distributing the database to a home banking system of the payor;

receiving, at the trusted third party, a biller order from the biller, the biller order comprising the payor's name, address and an amount to be paid by the payor to the biller;

upon receipt by the trusted third party of the biller order, generating, at the trusted third party, a bill routing message and transmitting the bill routing message to the payor's home banking system, the message including the universal identifier number corresponding to the payor; and

upon receipt by the home banking system of the bill routing message from the trusted third party, routing, by the home banking system, a bill to the payor corresponding to the bill routing message.

27. A method according to Claim 26, wherein the bill routing message comprises an ACH message, the ACH message being formed based at least in part upon routing information resident in a master database resident at the trusted third party.

28. A method of electronic funds transfer between a payor and a payee by an intermediate trusted third party, the trusted third party having previously distributed to a home banking system of the payor a database including universal identifier numbers uniquely identifying accounts including that of the payee; said method including the steps of:

receiving, at the home banking system, a payment order from the payor;

upon receipt by the home banking system of the payment order, identifying, at the home banking system, the universal identifier number uniquely identifying payee's account from information stored in the database; and

- 58 -

transmitting, by the home banking system, the universal identifier number identified in said identifying step, to the trusted third party to facilitate payment to payee's account.

29. A computer-readable medium for storing data for access by an application program being executed on a data processing system resident at a trusted third party that has been supplied with confidential information of customers of at least one participating institution, said medium comprising:

a data structure stored in said computer-readable medium, said data structure including information resident in a database used by said application program and comprising:

a plurality of descriptors, each descriptor including a set of indicia identifying name, address, and the confidential information for one of the customers of the at least one participating institution, and a universal identifier uniquely identifying the one customer.

30. A computer-readable medium according to Claim 29, wherein the database of descriptors is structured so as to eliminate any descriptors whose set of indicia constitutes a subset of the set of indicia of any other descriptor, in order to ensure uniqueness of descriptors.

31. A computer-readable medium according to Claim 29, wherein the database is structured to minimize the possibility that any one descriptor will be confused with any other descriptor by using distance functions to require a minimal distance between the sets of indicia included in respective descriptors.

- 59 -

32. A computer-readable medium according to Claim 29, wherein the database is structured to minimize the possibility that similar sounding name and address information does not encode to a same descriptor by using phonetic encoding techniques in preparation of the database.

33. A computer-readable medium according to Claim 29, wherein the confidential information comprises routing/transit number and account number information associated with each customer.

34. A method of transferring funds from a home banking system of a payor to an account of a payee, comprising the steps of:

upon receipt by the home banking system of a payment order from the payor that includes character information, encoding the received character information by assigning a numerical value to identified nonblank character strings present in the received character information;

forming a descriptor of indicia identifying the payee using the encoded numerical information;

comparing the formed descriptor with database descriptors stored in a database supplied by a trusted third party until a match is found; and

transmitting a universal identifier, associated in the database with the matching database descriptor and uniquely identifying the payee, to the trusted third party to facilitate payment to payee's account.

35. A web-based bill presentment method for presenting bills by a biller to a payor using a trusted third party having a resident database including an e-mail address of the payor, the payor being a customer of a bank that has a bill presentment server, said method comprising:

- 60 -

receiving, at the trusted third party, a bill presentment order from the biller; and

in response to an inquiry from the bill presentment server of payor's bank, transmitting billing information of the biller to the payor's bank, which in turn, by means of the bill presentment server, presents the bill for display to the payor using the e-mail address of the payor.

36. A web-based bill presentment method according to Claim 35, wherein display means available to the payor are linked to the bill payment server, and the payor indicates a willingness to pay the bill by clicking a payment icon displayed by the display means and associated with the bill.

37. A method of correlating between at least two entities by an intermediate trusted third party, said method comprising the steps of:

receiving, by the trusted third party, a universal identifier number uniquely identifying a first one of the at least two entities and generated in response to a inquiry from a second one of the at least two entities from information stored on a database; and

generating, at the trusted third party, from the received universal identifier number confidential information relating to the first one of the at least two entities to identify the first one, the confidential information being known only to the trusted third party.

38. A method according to claim 37, further comprising the steps of:


generating the database at the trusted third party, the database including name and address information of the first one of the at least two entities and the universal identifier number uniquely

- 61 -

identifying the first one, and not including  
corresponding confidential information of the first  
one, and

distributing, before said confidential information  
generating step, the database so as to facilitate  
access to the database by the second one of the at  
least two entities.

1/16

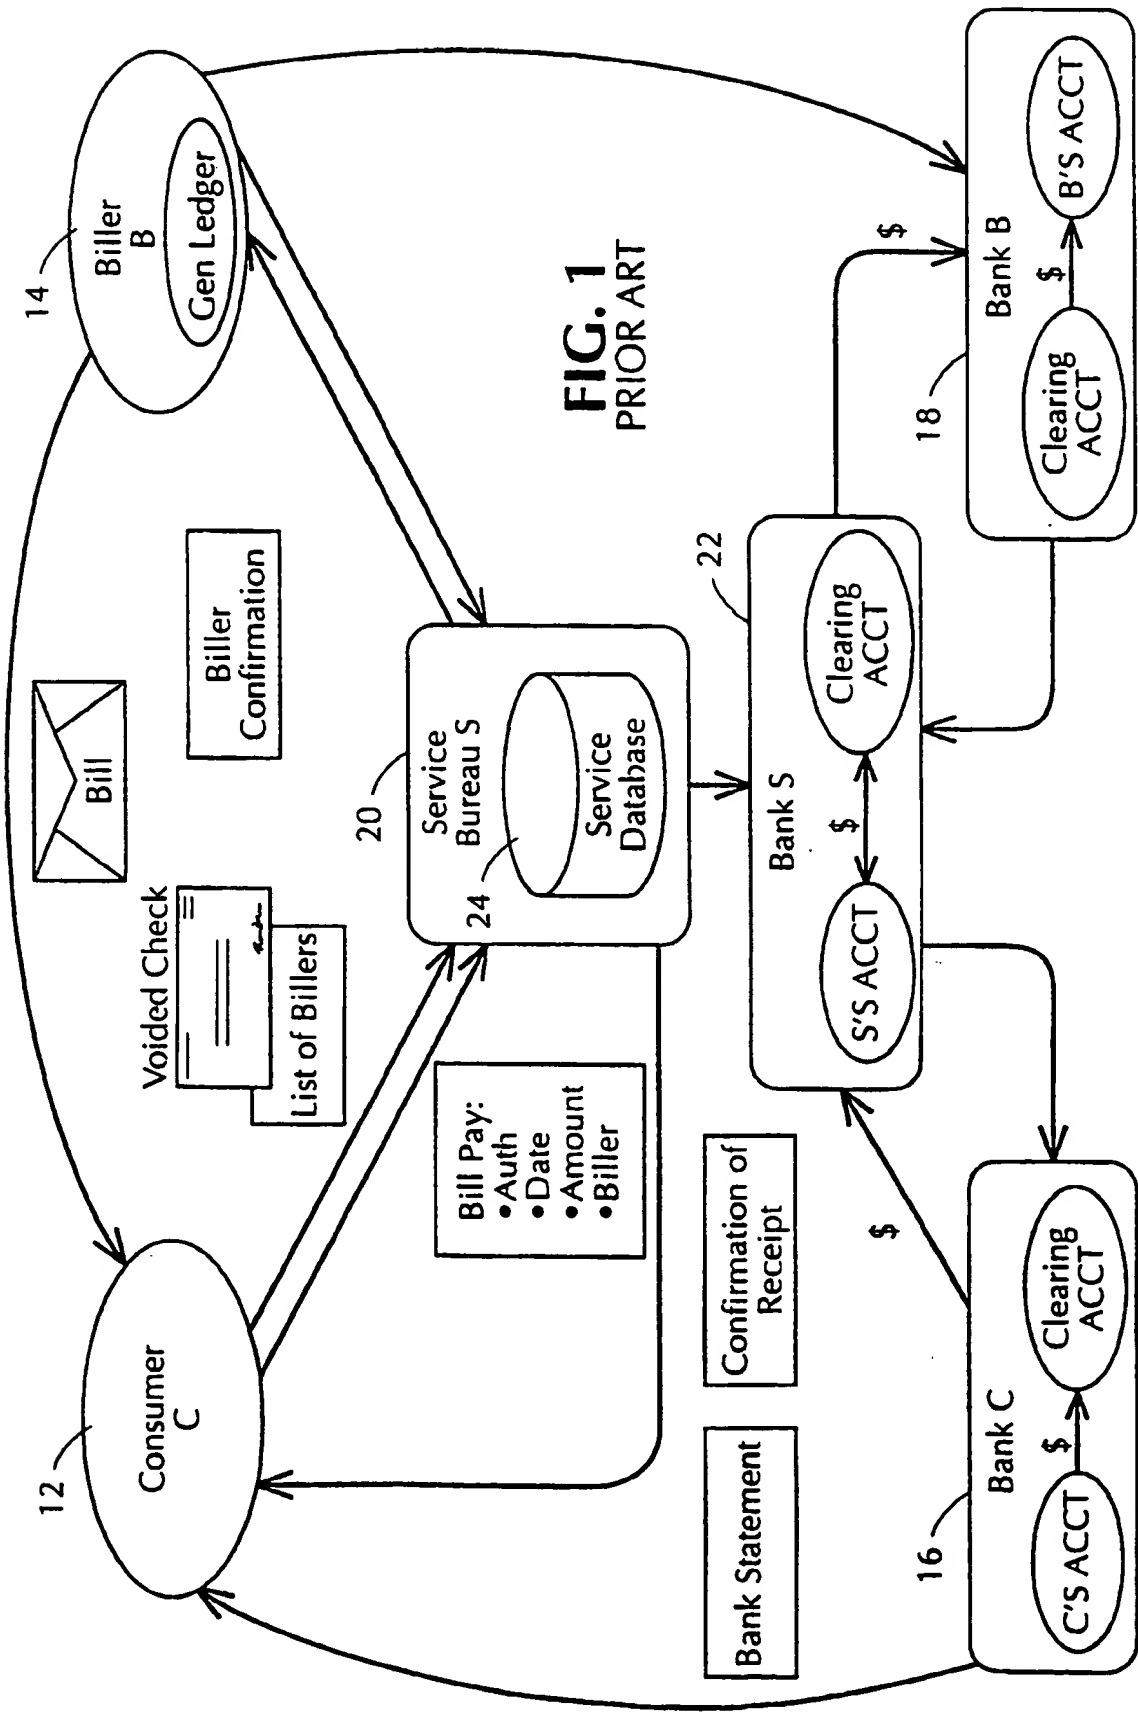



2/16

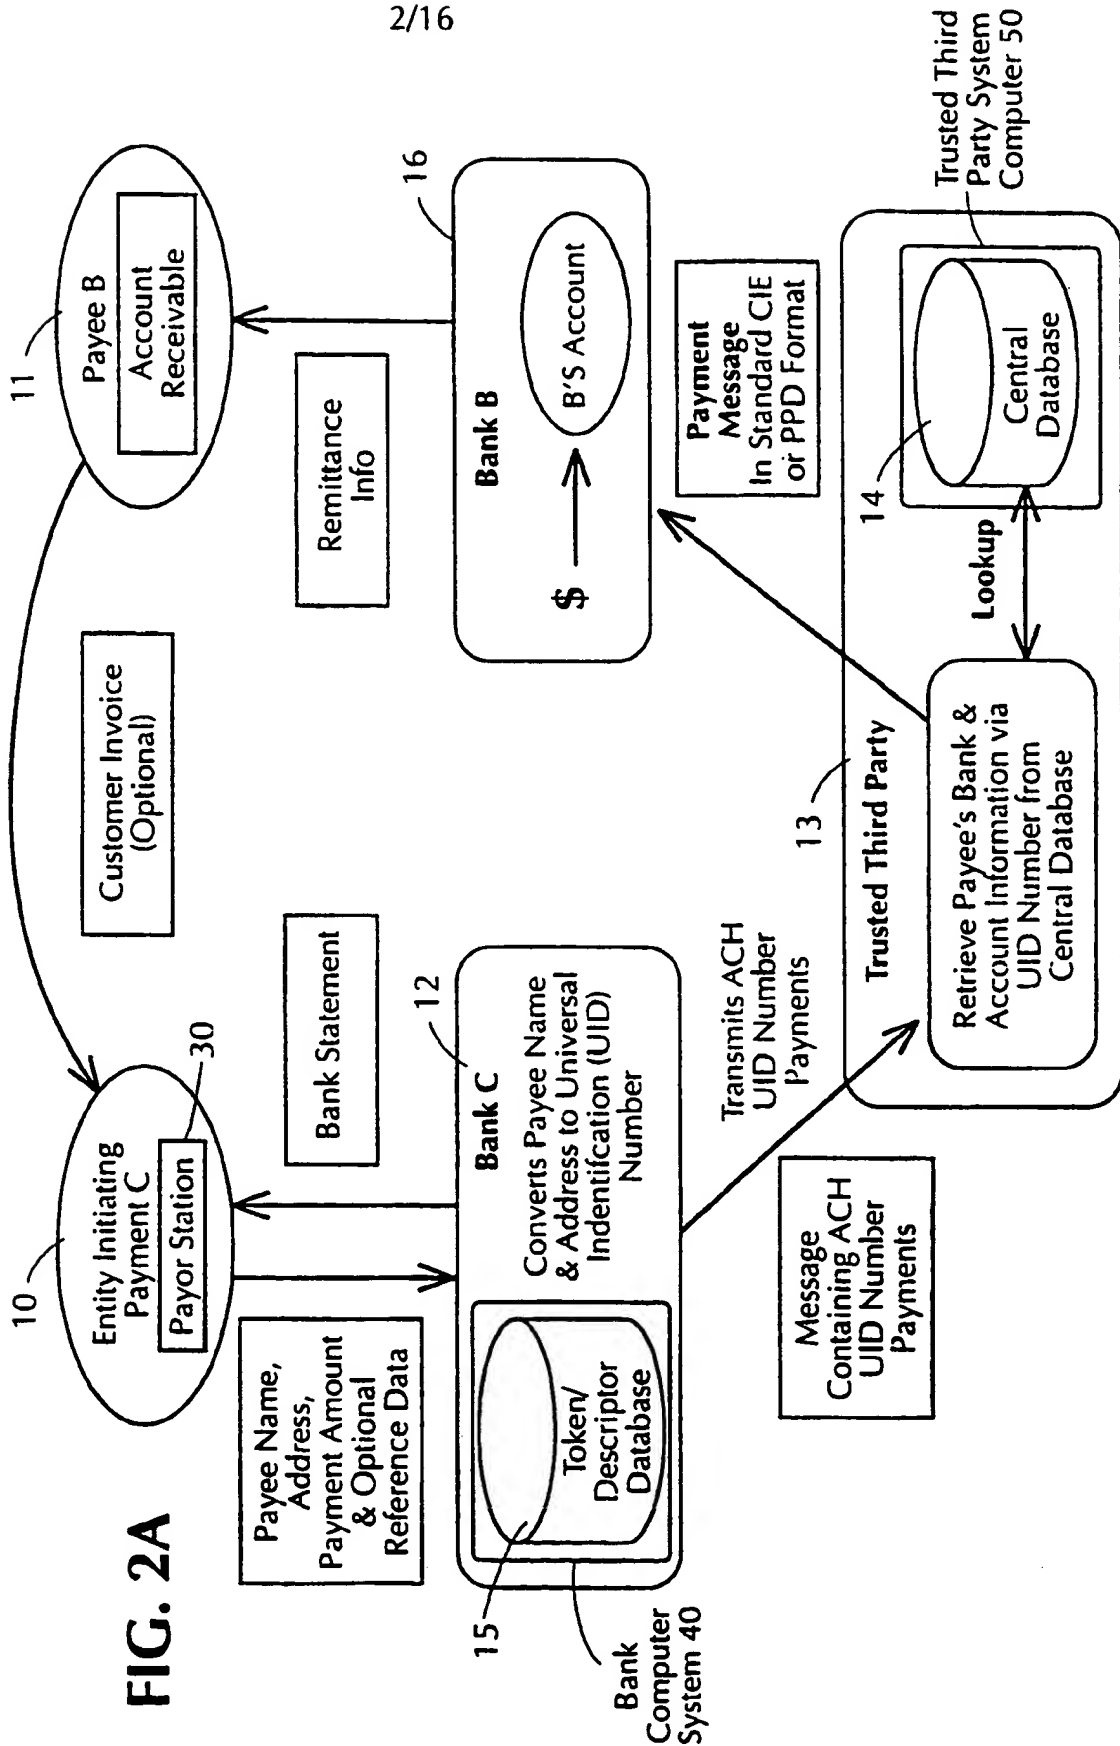


FIG. 2A

3/16

FIG. 2B

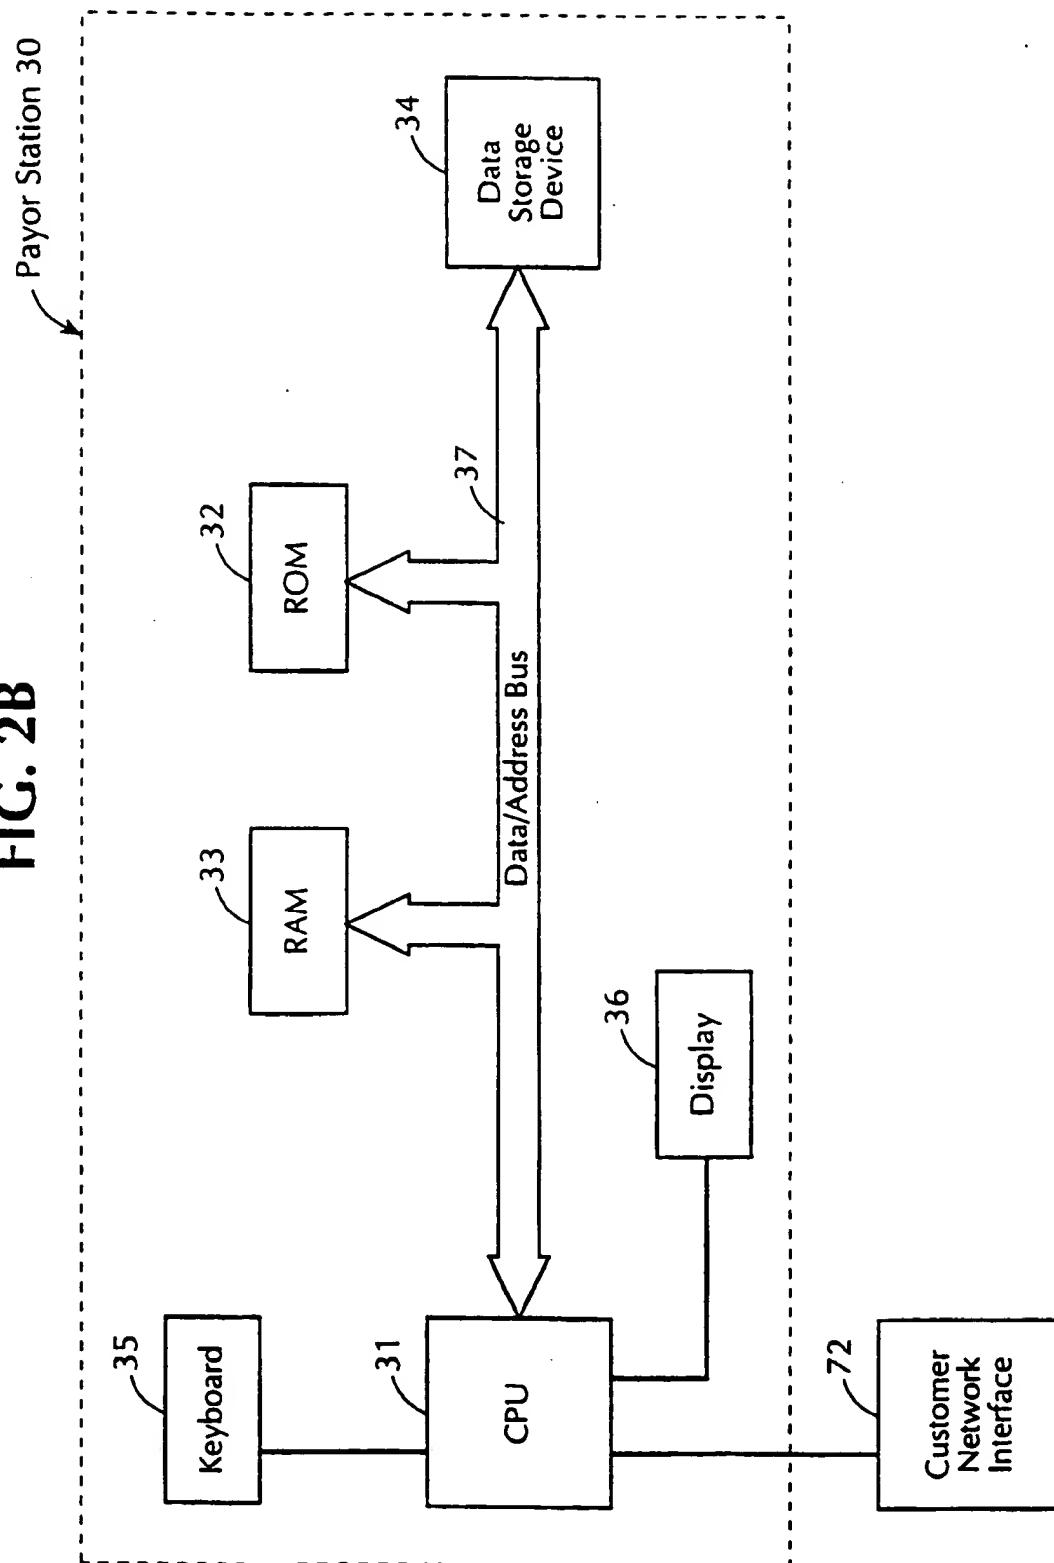


FIG. 2C



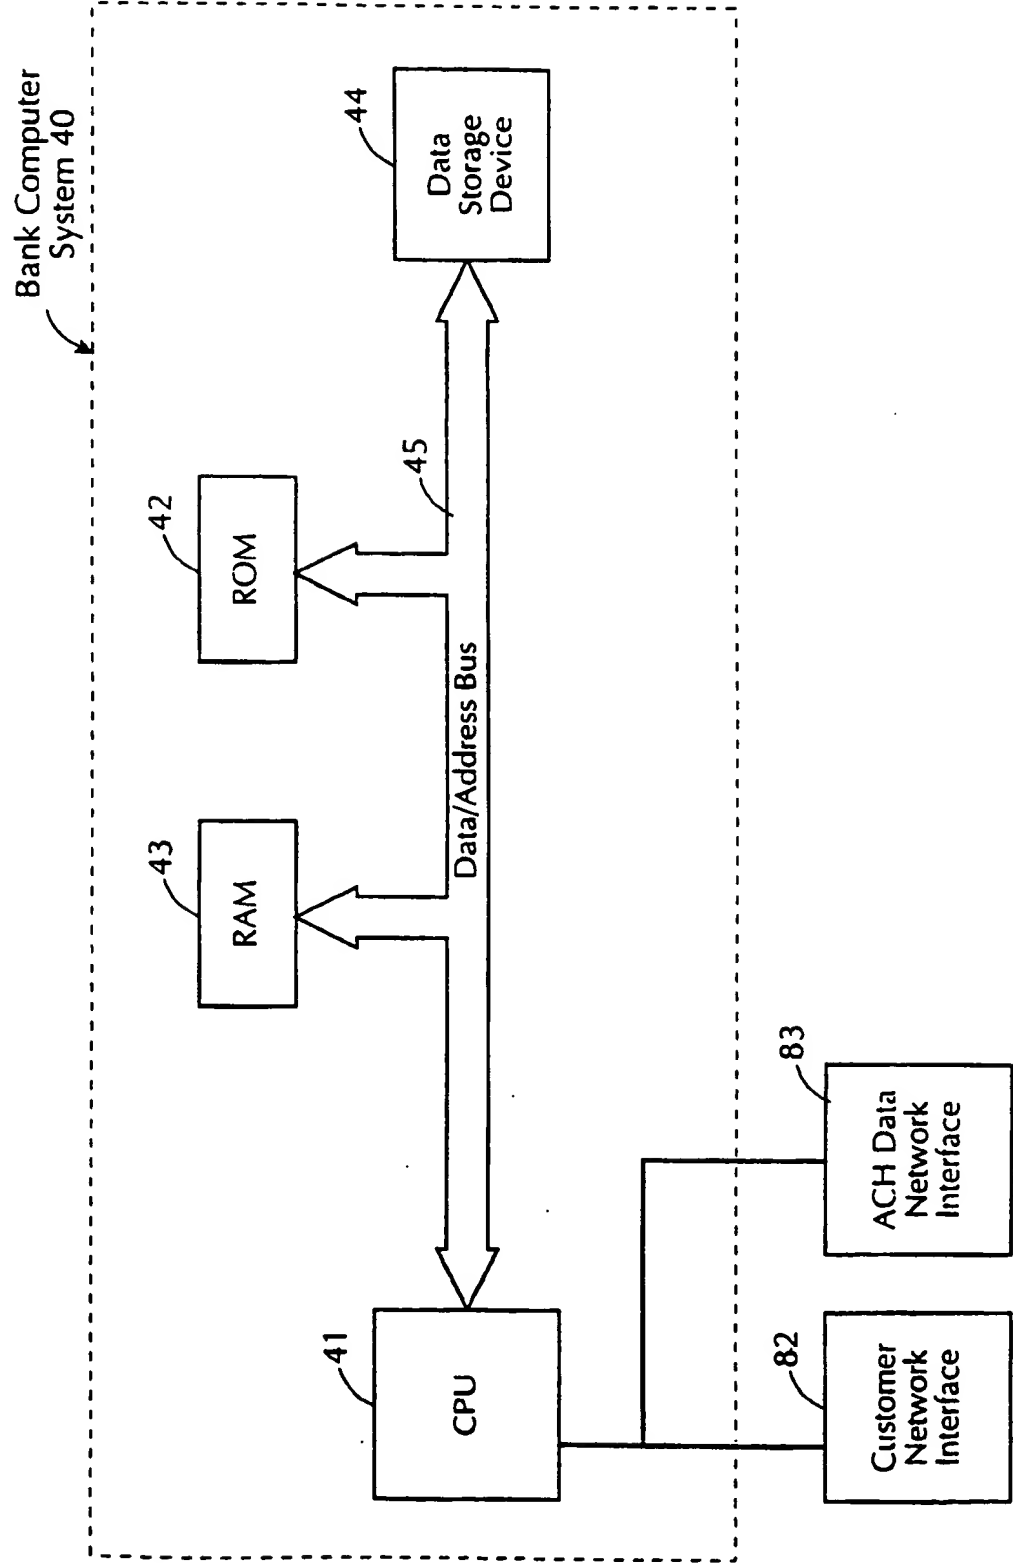



FIG. 2D

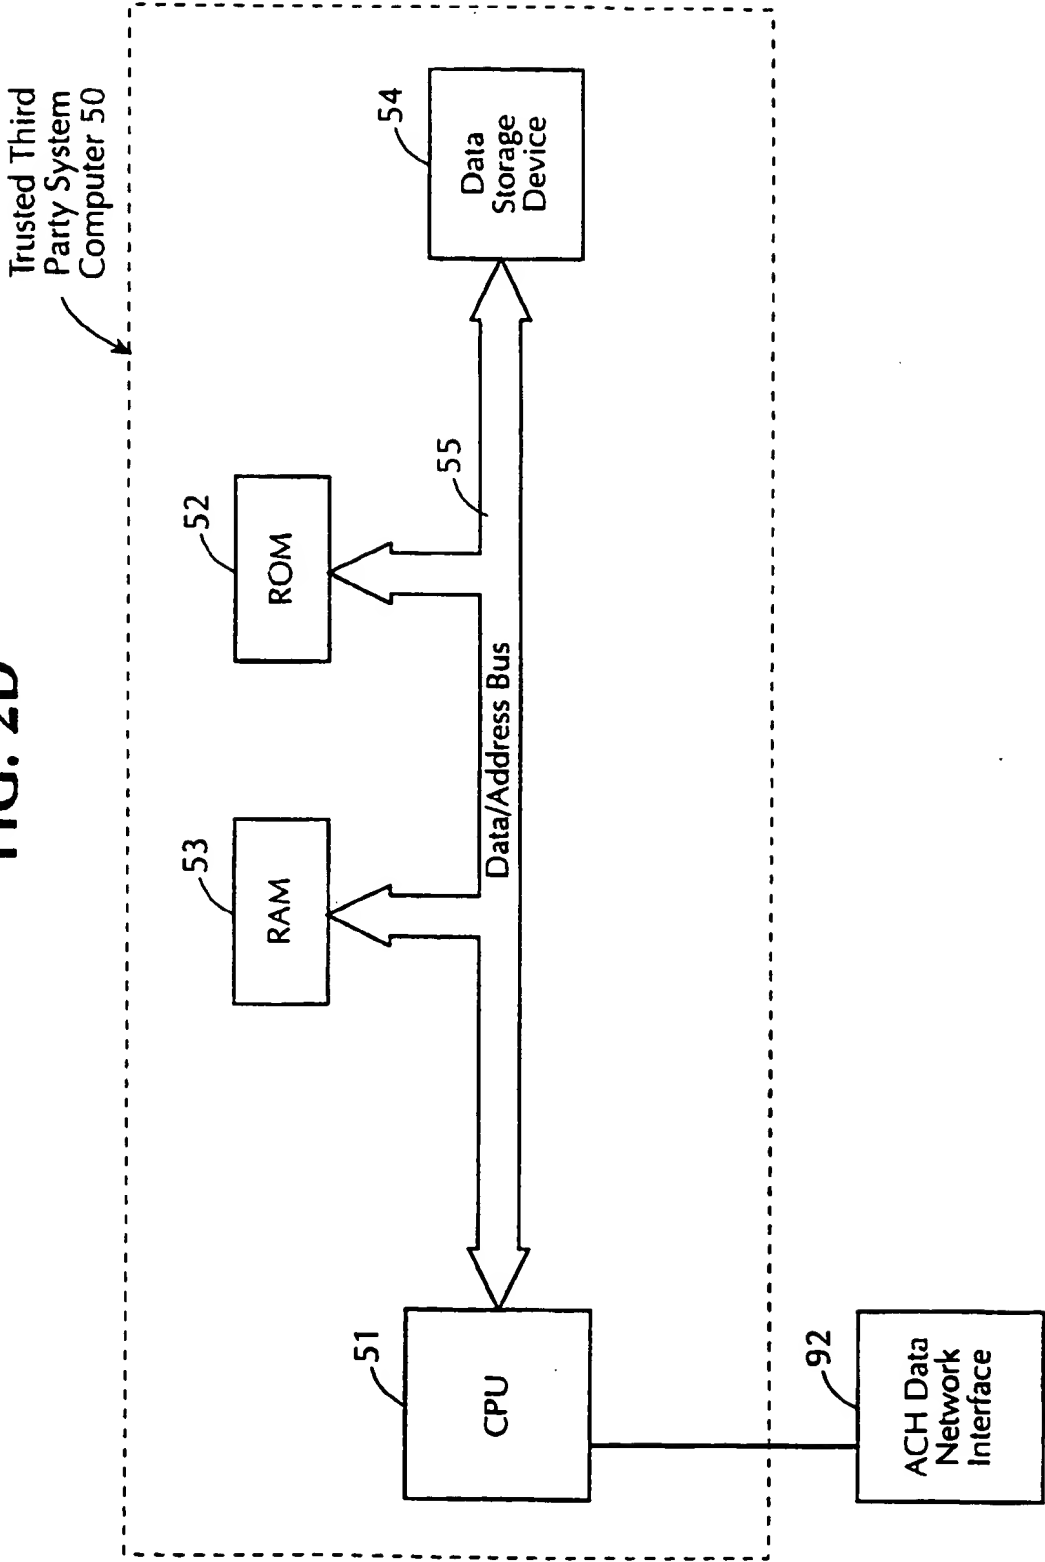

6/16

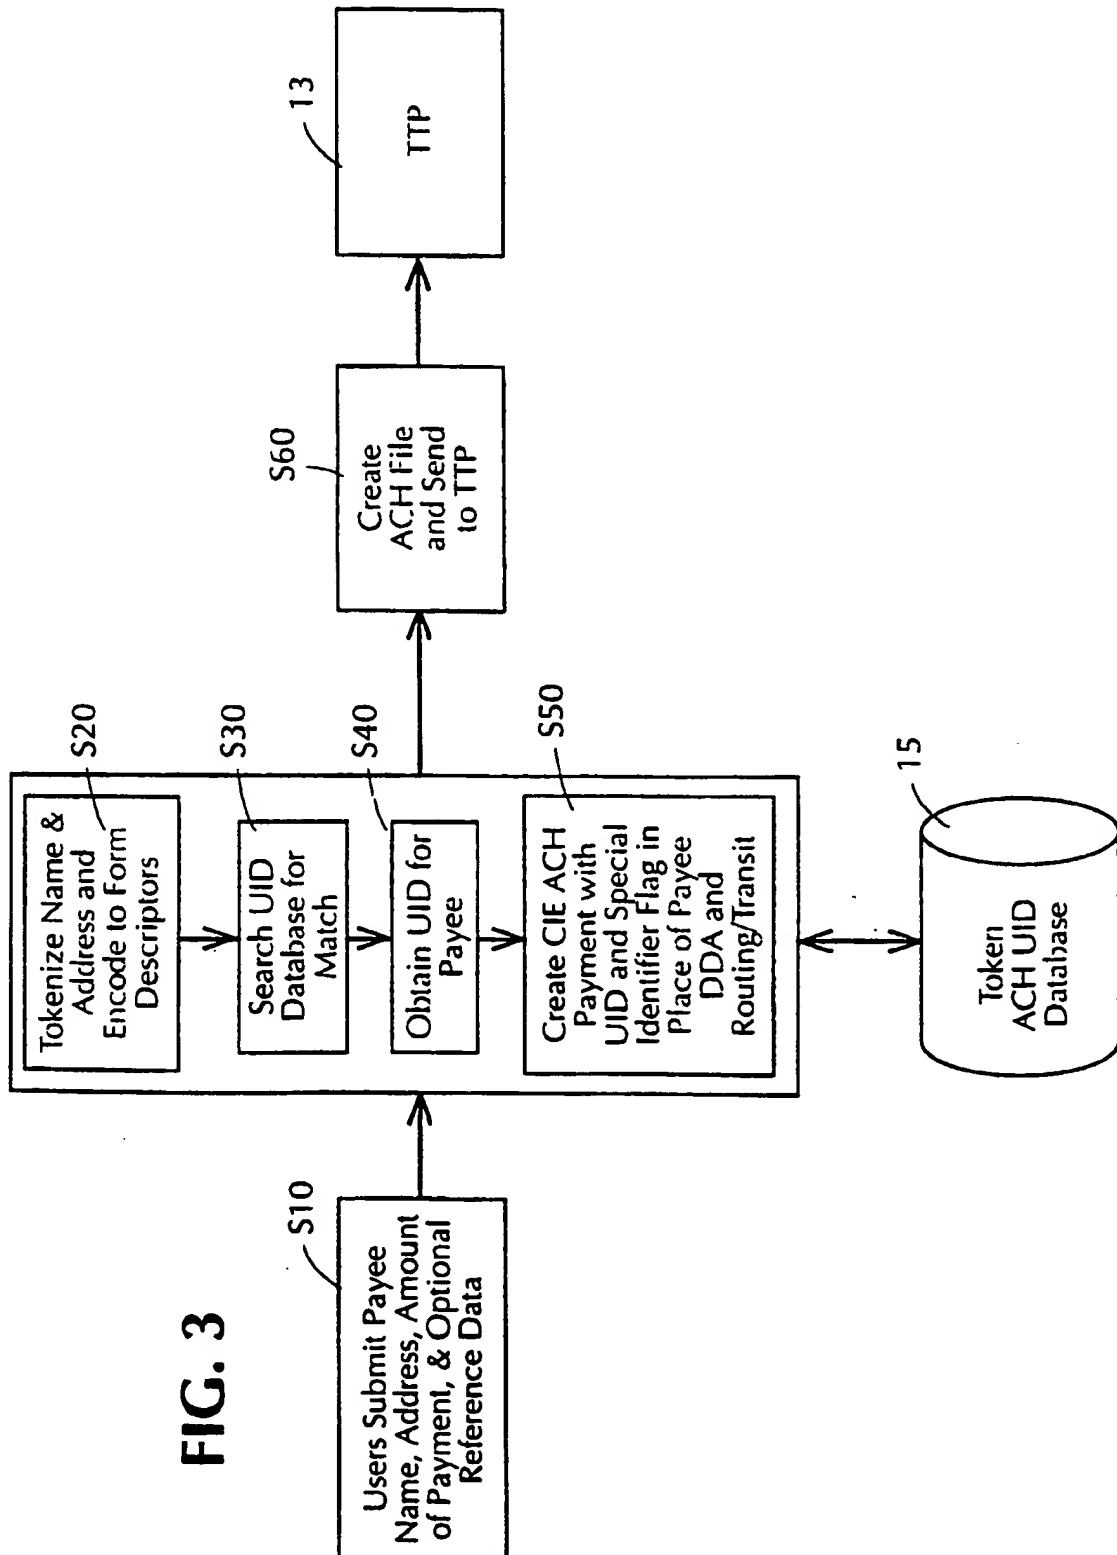

7/16

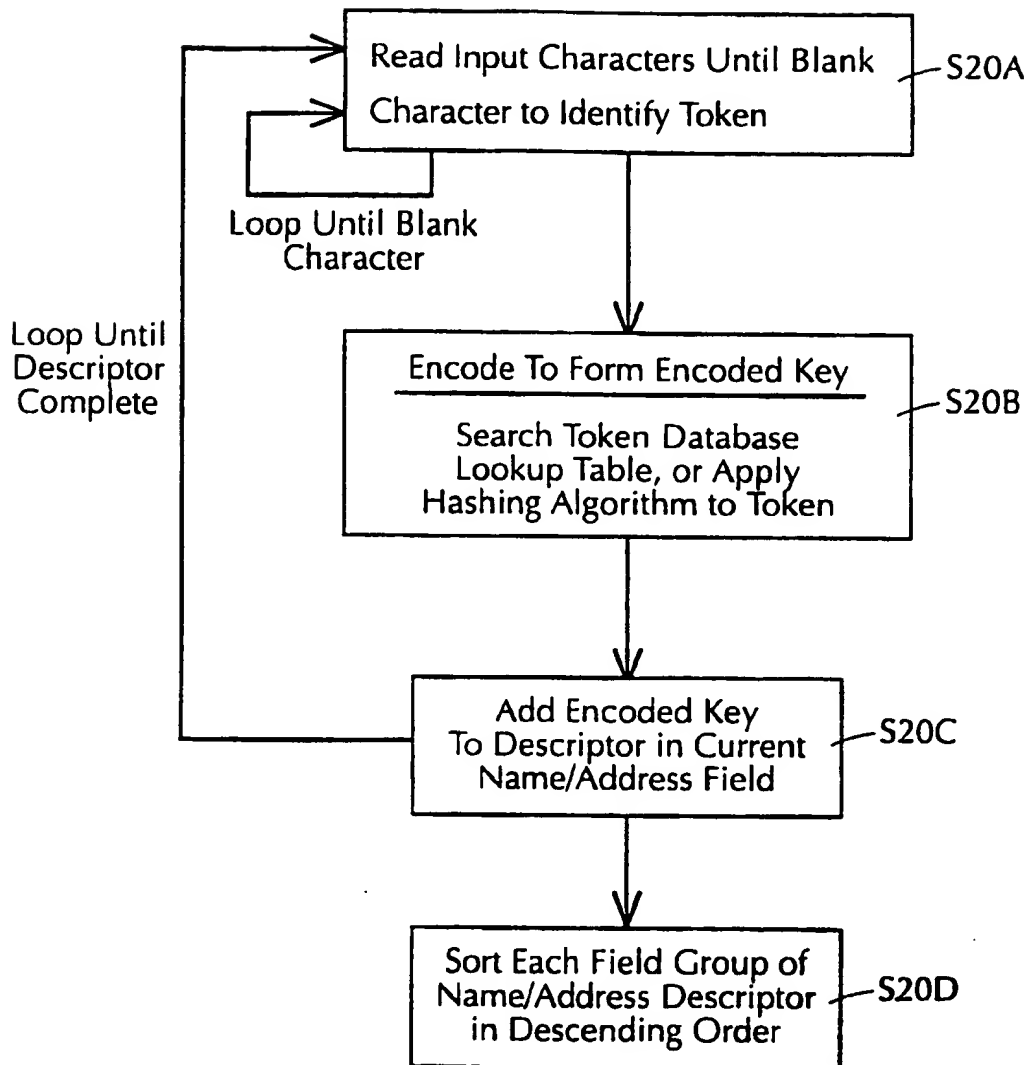**FIG. 4**

8/16

FIG. 5

Name:  
National Mortgage Bank

Address:  
1 Main Street

City: Chicago    State: IL    5-Zip: 30251    4-Zip: 1237  
(Alpha) (Zip Not Encoded)

Bank =1    Street =2  
National =50    Main =40  
Mortgage =60    1 =65

Name:  
National Mortgage Bank

Address:  
1 Main Street

City: Chicago    State: IL    5-Zip: 30251    4-Zip: 1237  
(Alpha) (Zip Not Encoded)

Bank =1    Street =2  
National =50    Main =40  
Mortgage =60    1 =65


Name			Address							City		State	5-Zip	4-Zip	UID & Other Information
60	50	1	0	0	0	65	40	2	0	16	0	IL	30251	1237	
60	50	1	0	0	0	65	40	2	0	16	0	IL	30251	1237	UID & Other Information

9/16

**FIG. 6(a)**

National Mortgage Bank	1 Main Street	Chicago	IL	30251	1237
------------------------	---------------	---------	----	-------	------

**FIG. 6(b)**



Name			Address					City		State	5-Zip	4-Zip		
60	50	1	0	0	0	65	40	2	0	16	0	IL	30251	1237



10/16

FIG. 7

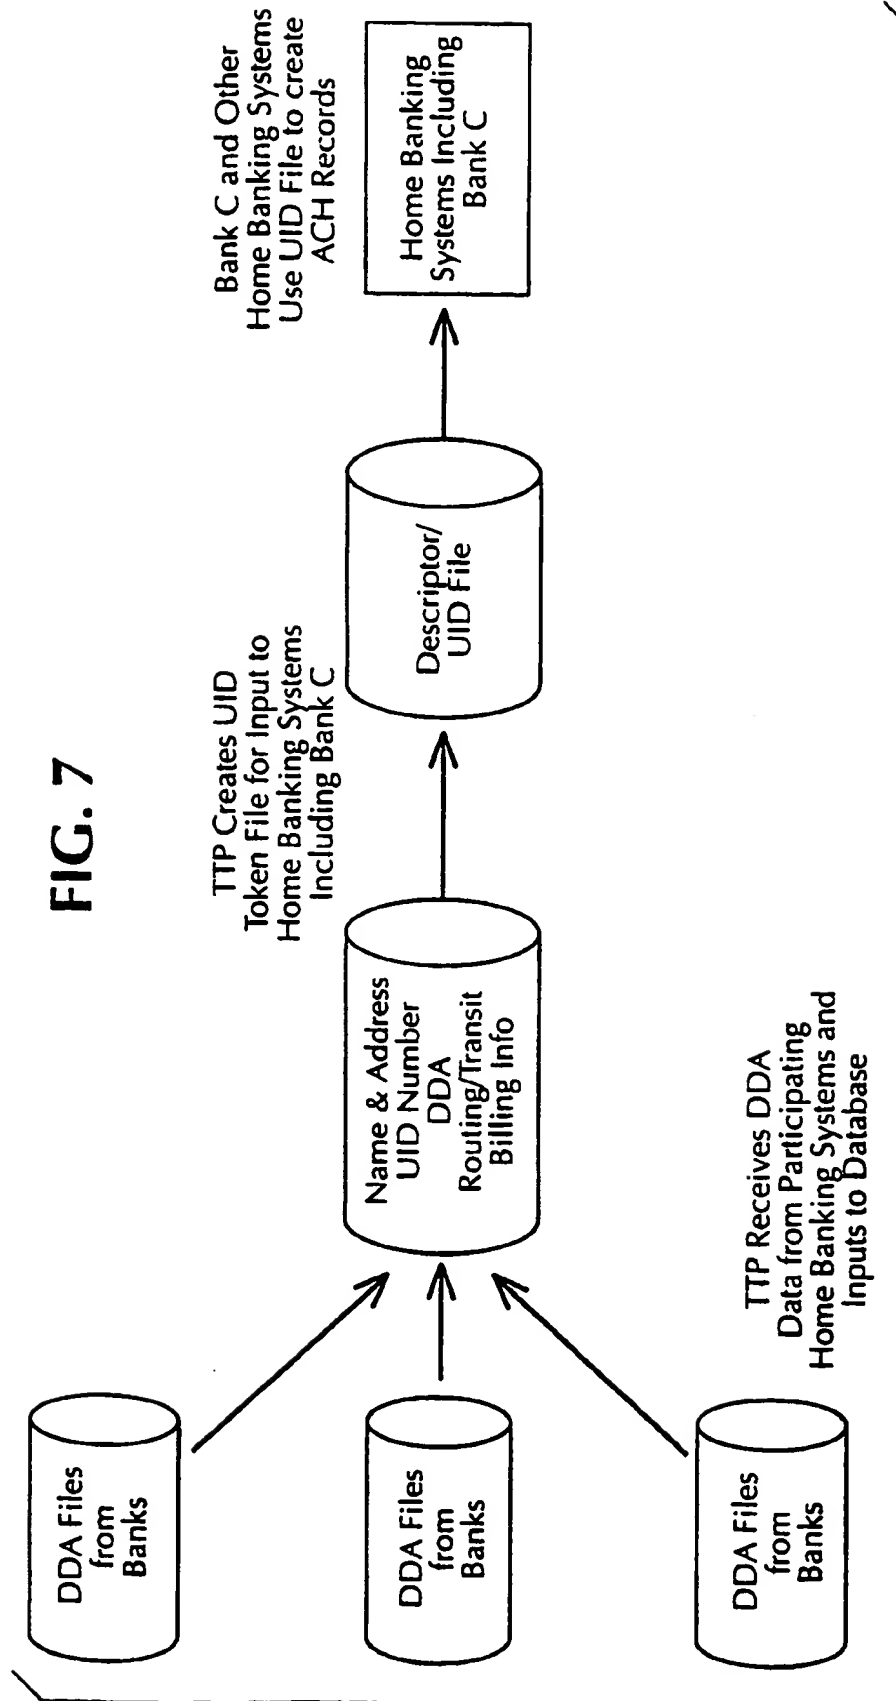


FIG. 8A

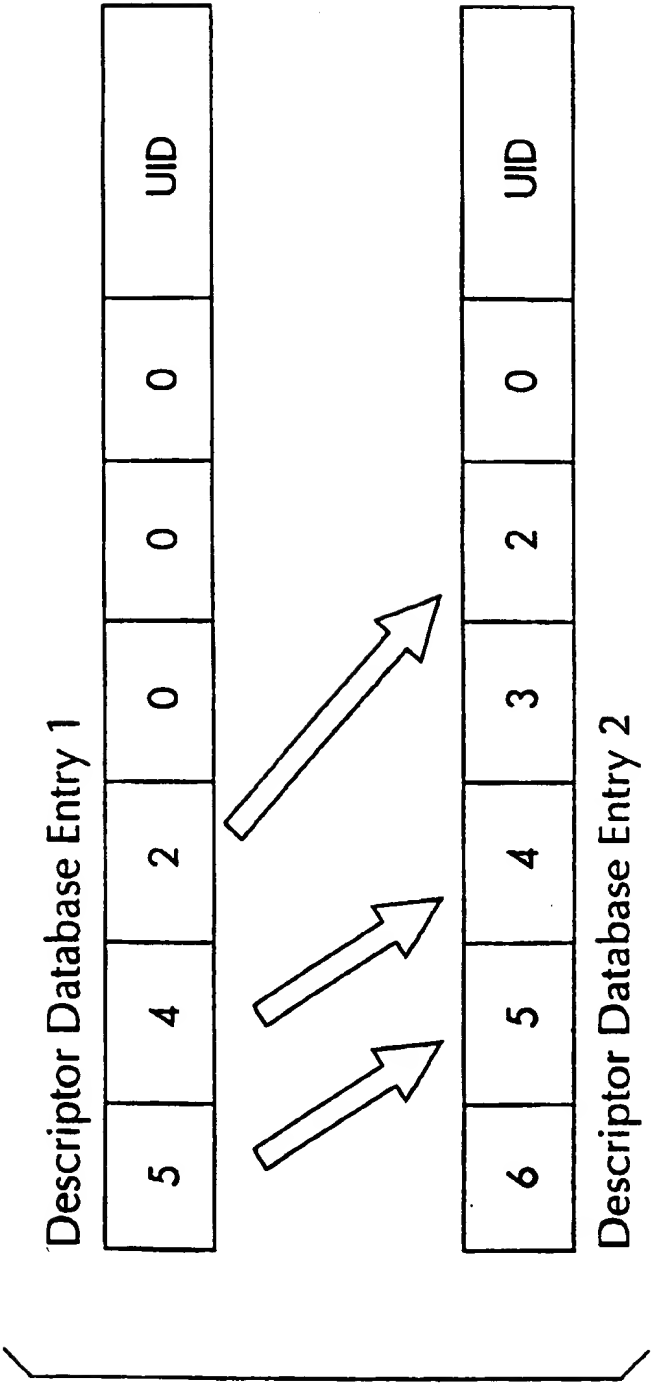



FIG. 8B

National Mortgage Bank  
Bank =1  
National =50  
Mortgage =60

60	50	1	0	0	0	UID#
50	1	0	0	0	0	UID#
1	0	0	0	0	0	UID#


13/16

FIG. 9

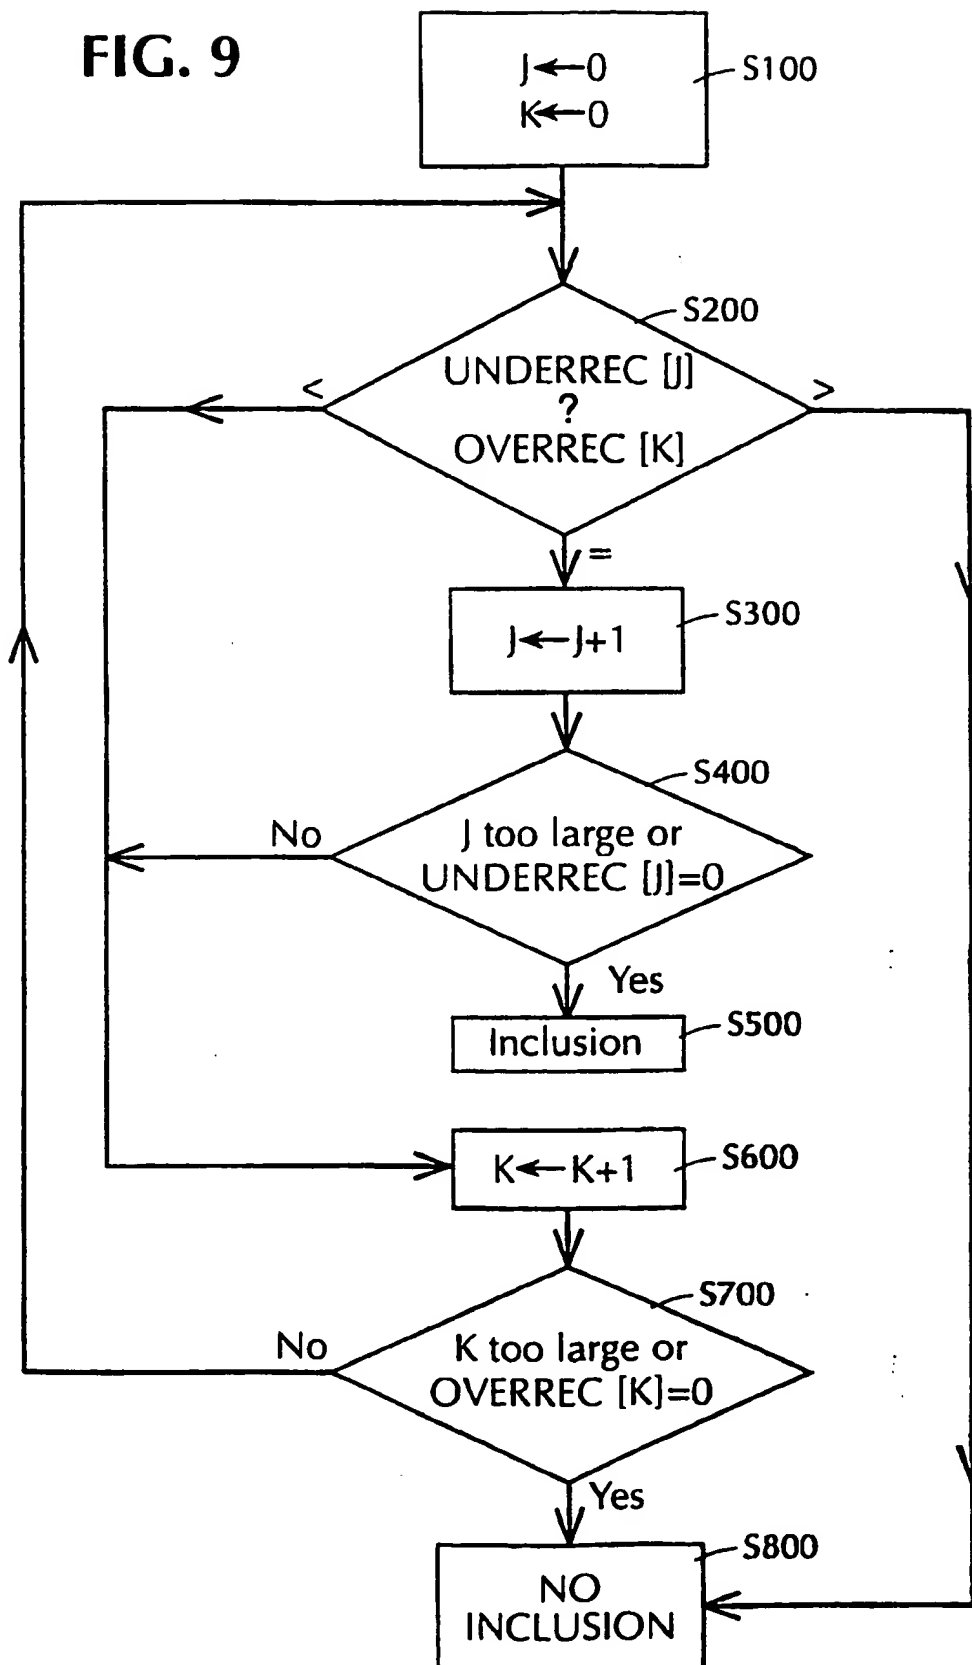


14/16


FIG. 10

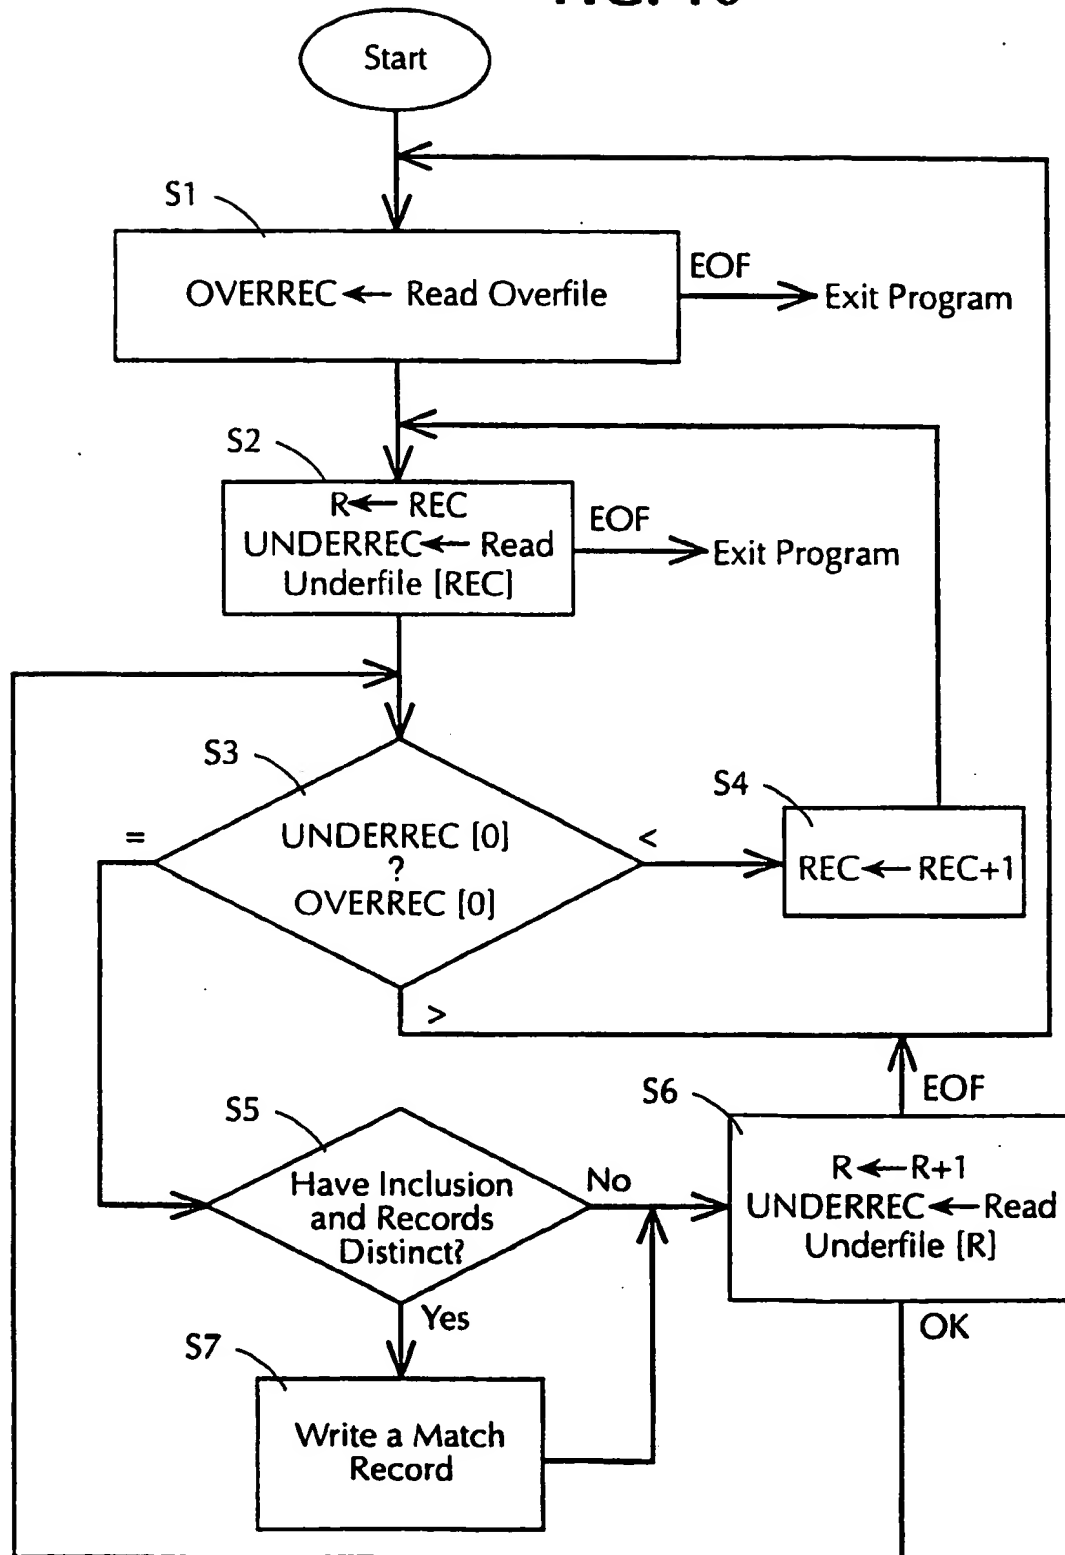

15/16

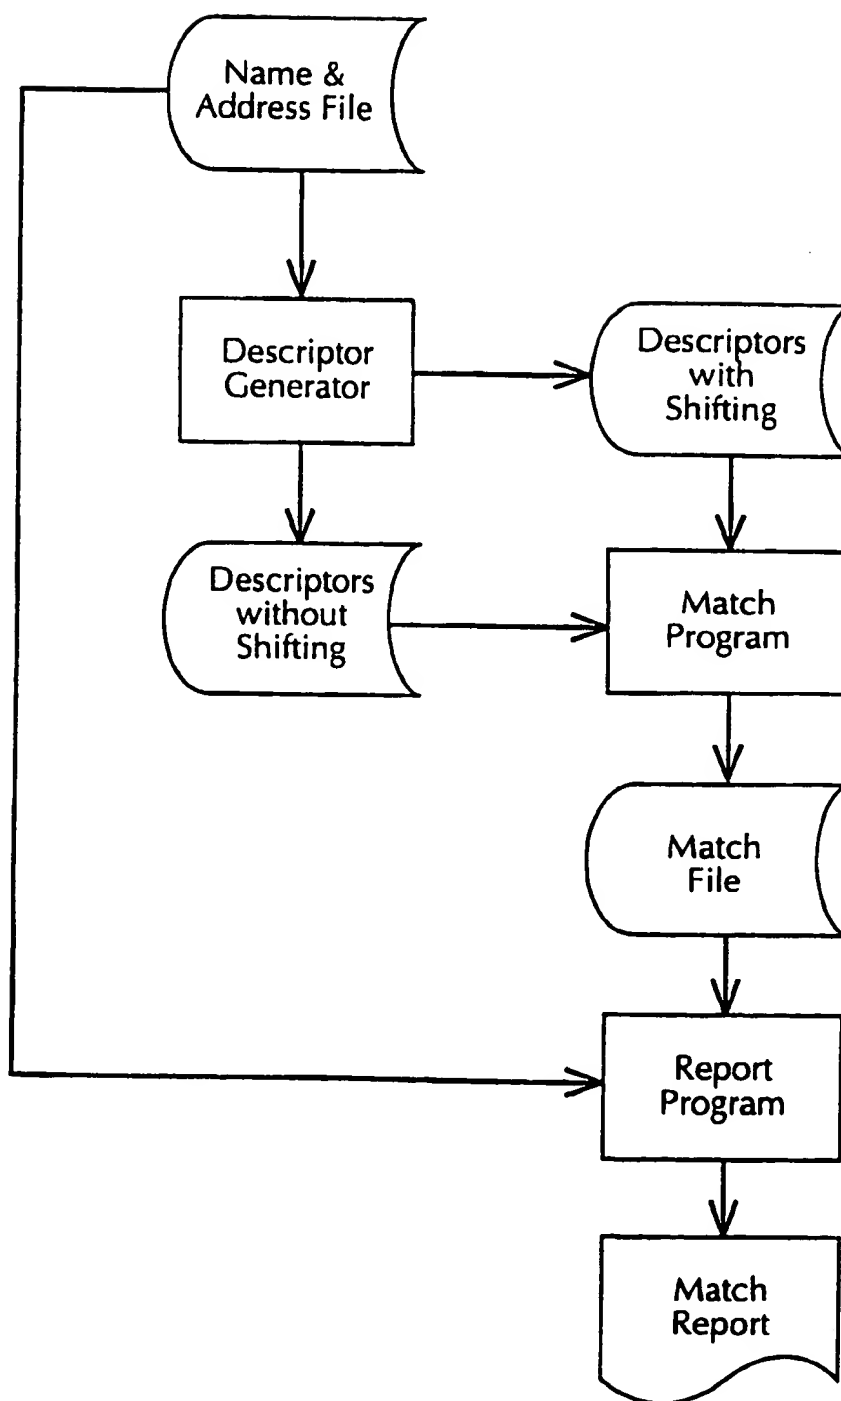**FIG. 11**

16/16

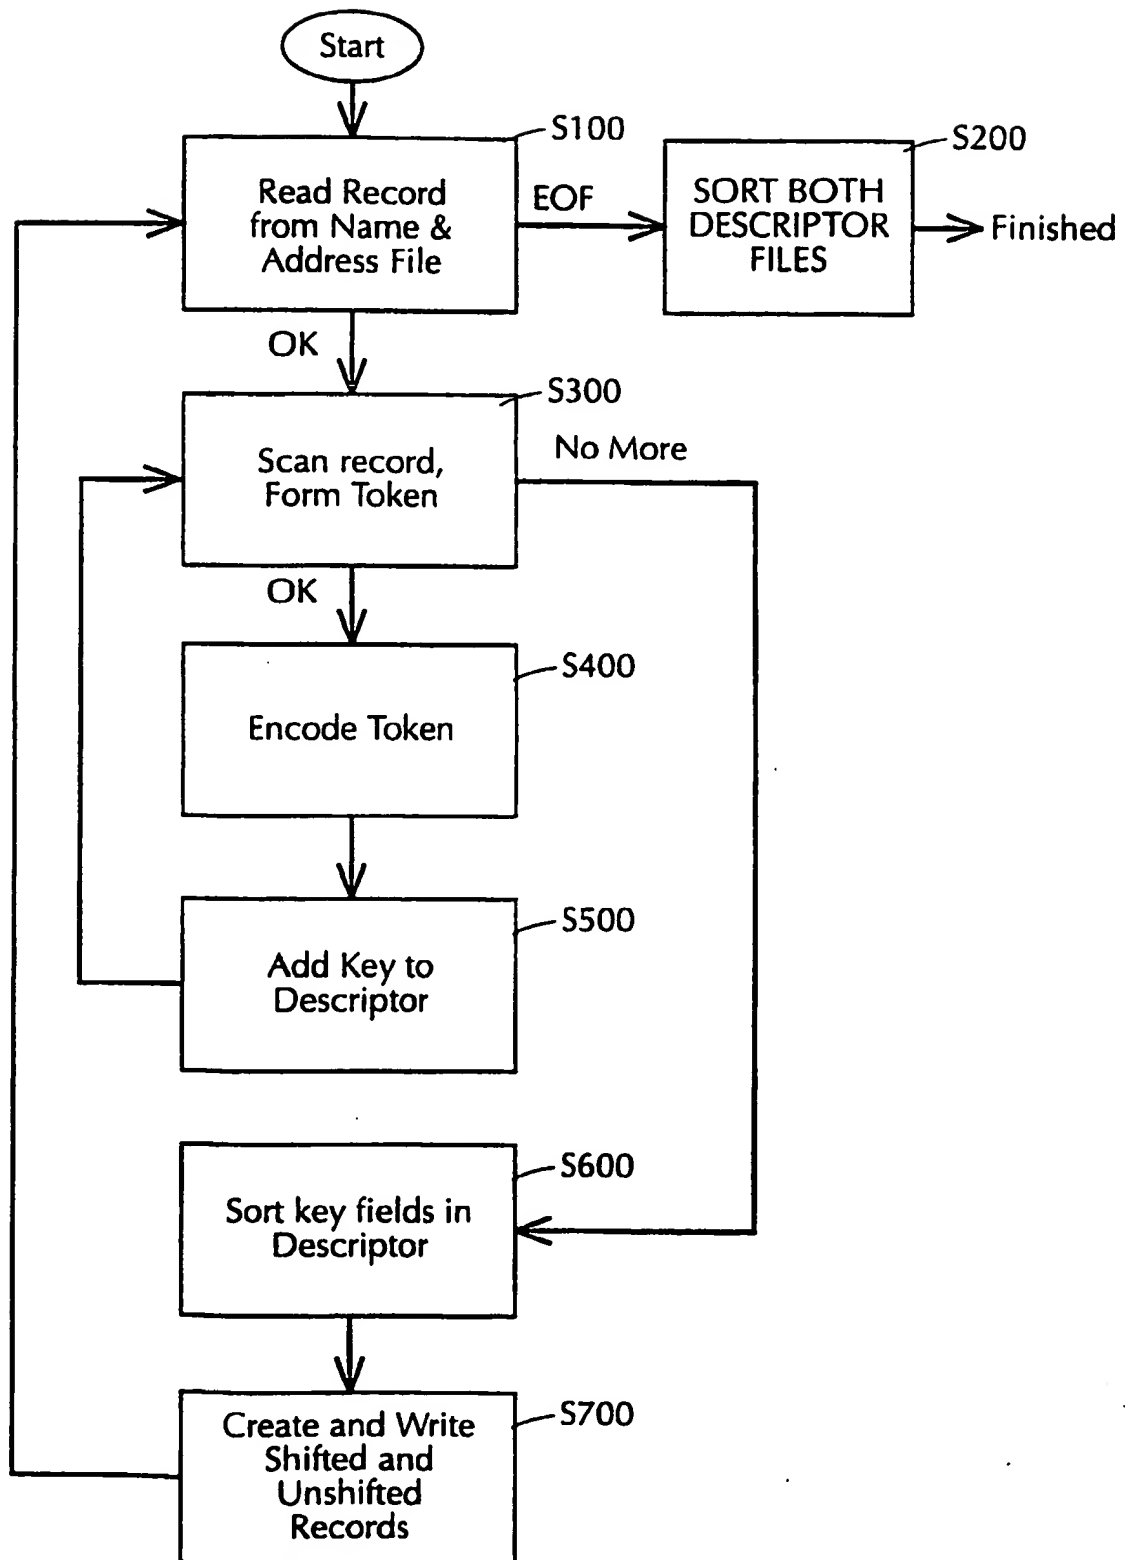**FIG. 12**

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US99/09064

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> IPC(6) : G06F 15/21 US CL : 705/42 According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) U.S. : 705/42,69,74 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) APS IMAGE, APS TEXT, DIALOG, PROQUEST		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5,095,480 A (FENNER) 10 March 1992, Abstract.	1-38
A	US 5,111,395 A (SMITH et al) 05 May 1992, Abstract, Fig. 1.	1-38
A	US 5,383,113 A (KIGHT et al) 17 January 1995, Abstract, Fig. 1.	1-38
A	CAREY, THERESA W. Quicken versus Money. PC World. April 1996. Vol. 14, No. 4. Page 162(6).	1-38
X	US 5,677,955 A (DOGGETT et al) 14 October 1997, Figs. 2-4, 6, col. 3, lines 36-41, col. 7, lines 39-64 col. 9, lines 12-35, 48-62, col. 10, lines 5-21, col. 11, lines 8-14.	1-4, 11-15, 17, 24, 25, 29-34, 37, 38
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* Special categories of cited documents. "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document published on or after the international filing date "I" document which may throw doubt on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "L" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "A" document member of the same patent family	
Date of the actual completion of the international search 28 JUNE 1999		Date of mailing of the international search report 08 SEP 1999
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230		Authorized officer <i>James R. Matthews</i> SUSANNA MEISECKE-DIAZ Telephone No. (703) 305-1337



## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US99/09064

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5,699,528 A (HOGAN) 16 December 1997, Figs. 1, 3, 4, 5, 11.	35, 36
A, P	US 5,793,869 A (CLAFLIN, JR.) 11 August 1998, Abstract.	1-38